

PART NO. AND CH. CODE	L ₄	H ₁	H ₂	W ₁	R ₁	W ₂	R ₂	WIRE SIZE (mm ²)
7114-4110-02. Δ	13.00	Δ (2.45)	Δ (3.55)	2.30	0.45	2.80	0.45	Δ 0.3~0.6 OR EQUIVALENT
7114-4111-02. Δ	13.00	Δ (3.25)	Δ (4.45)	3.00	0.65	3.60	0.65	Δ 0.75~1.25 OR EQUIVALENT
7114-4112-02. Δ	13.00	Δ (4.00)	Δ (5.50)	3.70	0.85	4.60	0.90	1.5~2.5 OR EQUIVALENT
Δ 7114-4113-02. Δ	18.50	(5.40)	(7.05)	4.90	1.50	6.50	1.50	3.0~5.0 OR EQUIVALENT


注記

1. 嵌合相手品番: 7116-4110-02 ETC.
2. 7114-4113-02 においての通電電流値は、2.5 mm²電線相当以下とする。
3. 7114-4113-02 に 5 mm²電線を圧着して使用する場合には、専用ハウジングが必要となります。

NOTES

1. MATING PART NO. : 7116-4110-02 ETC.
2. CURRENT FOR 7114-4113-02 SHALL BE THE CURRENT FOR 2.5 mm² WIRE OR UNDER.
3. IN CASE 5 mm² WIRE IS CRIMPED WITH THE TERMINAL 7114-4113-02, SPECIAL HOUSING IS REQUIRED.

APPLICABLE WIRE SIZE MARK

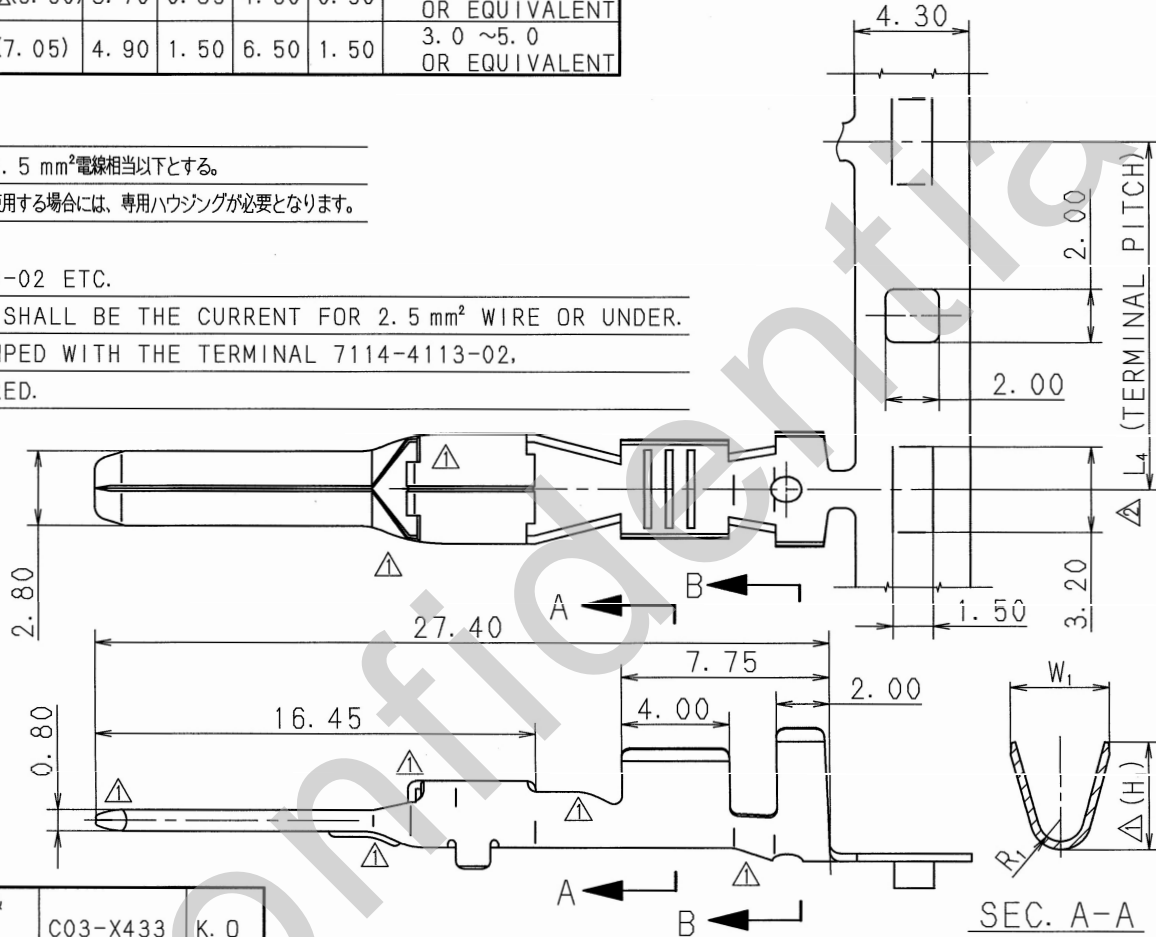

Δ	03.07.07	CHANGED WIRE SIZE & CORRECTION OF A CLERICAL ERROR	C03-X433	K. O													
Δ	99.10.11	ADDED NOTE ETC.	C99-7133	T. S	CUSTOMER												
Δ	99.02.17	ADDED PART NO. ETC.	C99-L408	Y. U	CUSTOMER PART NO.												
Δ	97.07.25	CHANGED FORM. Δ	C97-M151	H. K													
—	95.07.25	NEW	C95-M193	Y. U	OFFICE												
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR												
GENERAL TOLERANCE					VENDOR NO.												
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE				
A	\pm 0.15	\pm 0.2	\pm 0.3	\pm 0.5	\pm 0.75	\pm 30'	0.1	R	NEW	95.07.25	mm	4/5/1	3				
B	\pm 0.2	\pm 0.3	\pm 0.55	\pm 0.95	\pm 1.4	\pm 30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN					
\odot	\pm 0.3	\pm 0.5	\pm 0.8	\pm 1.4	\pm 2	\pm 30'	0.15				Y. UCHIDA	Y. OHKUBO					
SPECIFIED					MASS												

MATL.	COPPER ALLOY t=0.3	TREAT.	
SPEC.	(TIN PLATING)	& FIN.	
NAME	Δ 2.8 SYSTEM CONNECTOR		
	MALE TERMINAL		
PART NO. CH. CODE	7114-4110-02 ETC.		
DWG NO.	7114-4110-02:R	SET DWG NO.	
YAZAKI CORPORATION			