PART NO. AND CH. CODE	WIRE SIZE	W_1	③H_1	W	③H	TREAT. & FIN.
7114-1232	0.3~0.85	5.80	5.10	2.80	2.80	TIN PLATING
7114-1233	1.25~2	6.00	5.60	3.40	4.00	TIN PLATING
7114-1232-08	0.3~0.85	5.80	5.10	2.80	2.80	GOLD PLATING
7114-1233-08	1.25~2	6.00	5.60	3.40	4.00	GOLD PLATING

注記

③1. Auめっき範囲は Ⓢ 部とする。
(7114-1232-08, -1233-08)

③2. かん合相手品番 : 7116-1232, 7116-1232-08
7116-1233, 7116-1233-08
7116-1236, 7116-1237

③3. 適用ゴム栓品番 : 7157-3560, 7157-3563-60
7157-3561-80, 7157-3564-90, 7157-3565-50
7157-3652-70, 7157-3566-40, 7157-3653-61

③NOTES
1. AREA Ⓢ SHALL BE GOLD PLATED.
(7114-1232-08, -1233-08)
2. MATING PART NO. : 7116-1232, 7116-1232-08
7116-1233, 7116-1233-08
7116-1236, 7116-1237
3. APPLICABLE RUBBER SEAL PART NO. :
7157-3560, 7157-3563-60, 7157-3561-80
7157-3564-90, 7157-3565-50, 7157-3652-70
7157-3566-40, 7157-3653-61

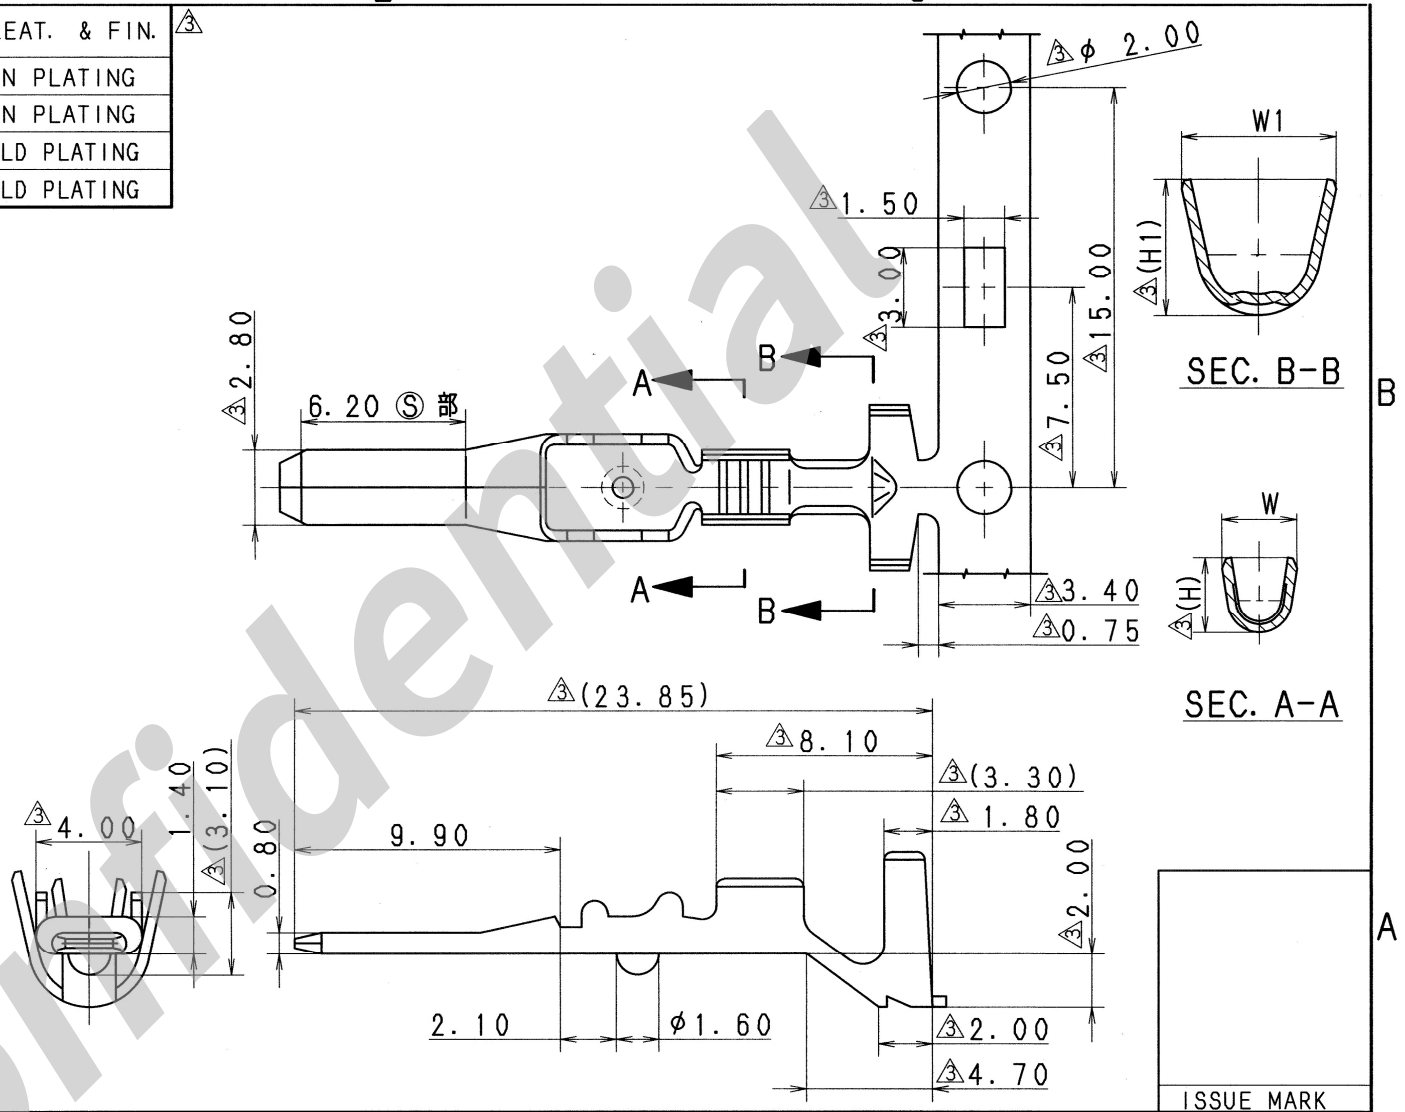

Confidential

LET	DATE	REVISION RECORD	NO.	CHKD
③	06/08/30	UPDATED DRAWING, ETC.	C06-Z921	M. A
②	96/08/07	CORRECTION OF CLERICAL ERROR	C96-6852	小林
①	92/10/21	CORRECTION OF CLERICAL ERROR	C92-7070	甲斐
	88/01/20	DRAWING REPLACEMENT & ADDED PART NO.	8MC-0125	鈴掛

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER
CUSTOMER PART NO. | CUSTOMER DWG NO.
OFFICE | TRIAL PART NO.
VENDOR
VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	88/01/20	mm	5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
杉山	斉藤	秋山	SAKAI	L. SYLUANCIA
06.08.30	'06.08.30	06/08/30	84/06/27	06/08/30

MATL. SPEC. ①BRASS (t=0.4) | TREAT. & FIN. SEE TABLE

NAME W TYPE TERMINAL (M)

PART NO. CH. CODE 7114-1232 ETC.

DWG NO. 7114-1232:R | SET DWG NO.

YAZAKI CORPORATION

ISSUE MARK