


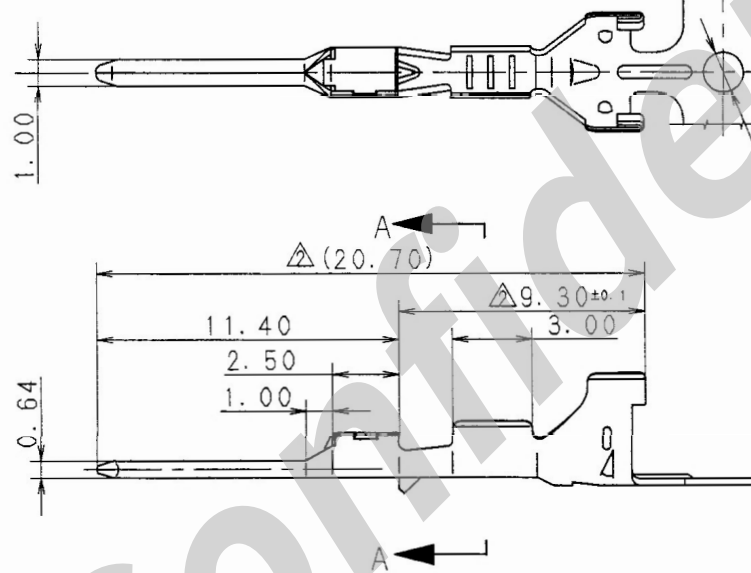


PART NO. AND CH. CODE	APPLICABLE WIRE SIZE	W
7114-1467-02	CAVS, CAVUS 0.3~0.5sq	2.10
7114-1468-02	CAVUS 0.85sq	2.65

- | | | |
|----------------------------------|-----------------------|------|
| 7114-1467-02
△ (7B14-1467-02) | CAVS. CAVUS 0.3~0.5sq | 2.10 |
| 7114-1468-02 | CAVUS 0.85sq | 2.65 |

-
- Technical drawing of a mechanical part, likely a bracket or support, showing dimensions and a watermark.
- Dimensions and features:
- Top horizontal dimension: $\Delta 3.00$
 - Second horizontal dimension from the left: $\Delta 1.50$
 - Vertical dimension from the top surface to the center of the circular hole: 3.00Δ
 - Vertical dimension from the top surface to the bottom of the rectangular cutout: $(5.50) \Delta$
 - Vertical dimension from the top surface to the bottom of the part: $PITCH = 11.00 \Delta$
 - Horizontal dimension from the center of the circular hole to the right edge: $\phi 1.50 \Delta$
- The drawing includes a circular hole and a rectangular cutout. A watermark "AM" is visible across the center.



SEC. A-A

ISSUE MARK

98.10.28	ADDED A/B PART NO.	C98-M822	K.U	CUSTOMER					MATL. SPEC.	SEE NOTES	TREAT. & FIN.		
97.08.27	ADDED DIMENSION	C97-7839	K.U	CUSTOMER PART NO.	CUSTOMER DWG NO.								
93.09.30	ADDED FORM ETC.	C93-7002	S.K					NAME					
93.09.09	NEW	C93-6960	S.K	OFFICE	TRIAL PART NO.				RV-TYPE TERMINAL (M)				
LET	DATE	REVISION RECORD NO.	CHKD	VENDOR									
GENERAL TOLERANCE													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	93.09.09	mm	5/1	3
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15		—		K. ABE	YOSHIDA	
SPECIFIED						MASS						7114-1467-02:R	
						g		98.11.11		98.11.05		90.12.25 98.10.28	
											YAZAKI CORPORATION		