


YAZAKI PART No.	APPLICABLE WIRE SIZE	W
7114-1467-08	CAVS, CAVUS 0.3~0.5sq	2.10
7114-1468-08	CAVUS 0.85sq	2.65


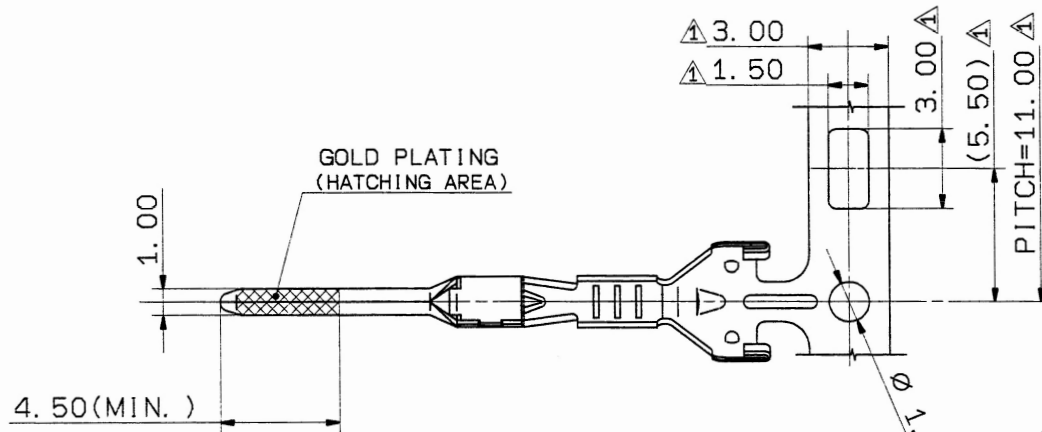


注 記

- 1) 材 料 : C2600(t=0.25), 金めっき
 2) 嵌合ターミナル品番 : 7116-1467-08, 7116-1767-08 ETC.

NOTES

- 1) MATERIAL : C2600(t=0.25), GOLD PLATING
 2) MATING TERMINAL NO. : 7116-1467-08, 7116-1767-08 ETC.

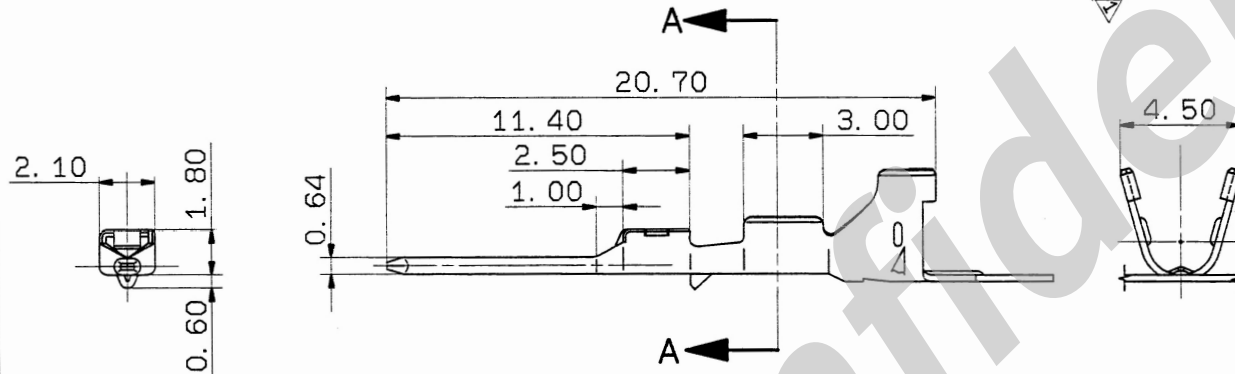

ISSUE MARK

								CUSTOMER					MATL. SPEC.				NOTE 1)				TREAT. & FIN.				NOTE 1)											
								CUSTOMER PART NO.					CUSTOMER DWG NO.																							
93.09.30		ADDED FORM ETC.			C93-7003		S. K												NAME RV-TYPE TERMINAL (M)																	
93.09.02		N E W			C93-6950		S. K		OFFICE					TRIAL PART NO.																						
LET		DATE			REVISION RECORD			NO.		CHKD		VENDOR																								
GENERAL TOLERANCE								VENDOR NO.																												
10MAX		50MAX		100MAX		250MAX		2500VR		ANGLE		ECCENT		DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE		PART NO.										
A ±0.15		±0.2		±0.3		±0.5		±0.75		±30'		0.1		R		NEW		93.09.02		mm		5/1		3		7114-1467-08 ETC.										
B ±0.2		±0.3		±0.55		±0.95		±1.4		±30'		0.1		APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO.												
C ±0.3		±0.5		±0.8		±1.4		±2		±30'		0.15		H 木				阿 部		K. ABE		野 松		7114-1467-08:R												
SPECIFIED								MASS					93.10.5					93.9.30					90.12.25					93.9.30					YAZAKI CORPORATION			