


△	PART NO.	TREAT. & FIN.	APPLICABLE WIRE SIZE	W ₁	H ₁	W ₂	H ₂
	7114-2882		CAVUS 0.3~AV 0.5	2.7	2.5	3.8	3.5
	7114-2882-02	TIN PLATED					
	7114-2883		CAVUS 0.85~AV 2	3.7	3.4	5.5	4.8
	7114-2883-02	TIN PLATED					

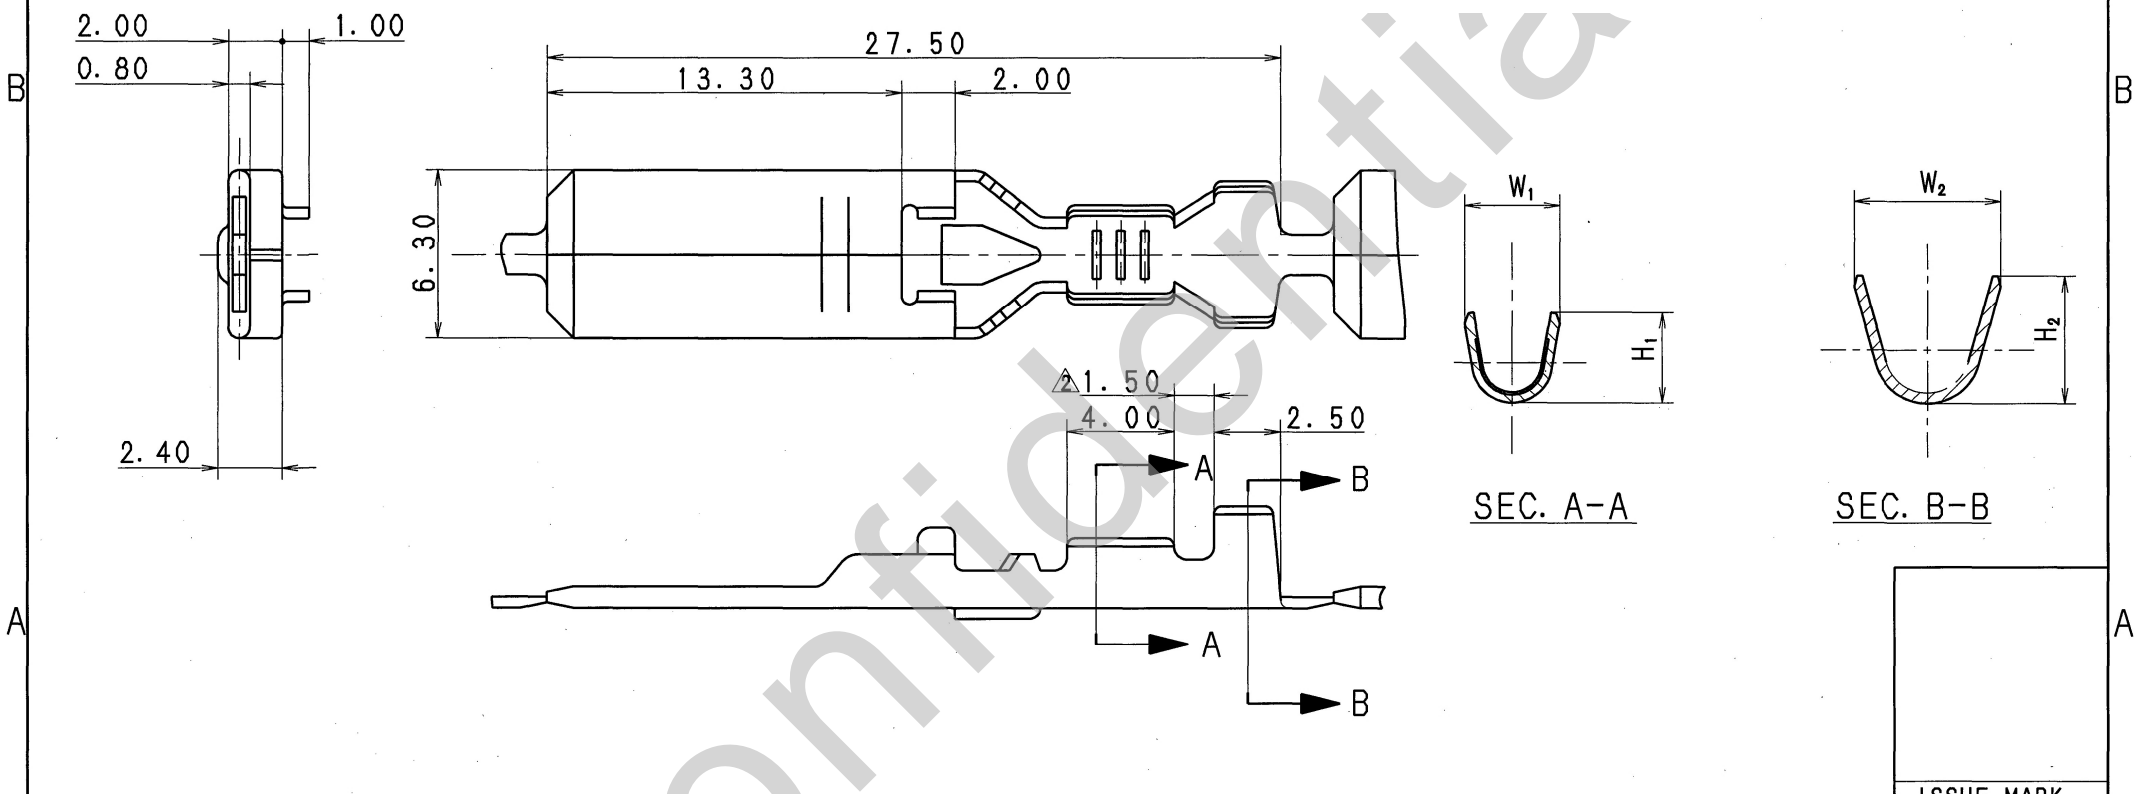

ISSUE MARK

△	2012/02/21	CHANGED MATERIAL INDICATION ETC.	C12-2269	E. I	CUSTOMER		MATERIAL: △ BRASS		TREAT. & FIN. △ SEE TABLE						
△	1993/03/19	ADDED PART NO.	C93-6368	M. K	CUSTOMER PART NO.		SPEC. (t=0.4)								
	1990/09/06	NEW	C90-7210	M. K	OFFICE		NAME M-US TYPE TERMINAL MALE								
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR		TRIAL PART NO.								
GENERAL TOLERANCE				VENDOR NO.											
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	1990/09/06	mm	2:1	3	7114-2882 ETC.	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO. 7114-2882:R	
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	M. KASHIYAMA	Y. FUKASE		K. JINNO	E. ITALIA		SET DWG NO.	
SPECIFIED				MASS		2012/02/21		2012/02/21		1989/04/04		2012/02/21		YAZAKI CORPORATION	