PART NO. AND CH. CODE	R_1	W_1	R_2	W_2	②H_1	②H_2	C_1	C_2	D	WIRE SIZE (mm²)
7114-4120-02	0.70	3.10	0.65	3.70	(3.10)	(4.40)	4.00	2.00	7.75	③0.5 ~ 1.25 OR EQUIVALENT
7114-4121-02	0.95	4.00	0.85	4.90	(4.00)	(6.00)	4.00	2.00	7.75	③1.35 ~ 2.5 OR EQUIVALENT
7114-4122-02	1.35	5.00	1.30	5.70	(4.80)	(6.70)	4.50	3.00	10.00	③3.0 ~ 4.0 OR EQUIVALENT
①7114-4124-02	1.35	5.60	1.30	6.60	(5.85)	(7.40)	4.50	3.00	10.00	5.0 OR EQUIVALENT

注 記

1. 嵌合相手品番：7116-4120-02 ETC.
2. ② 7114-4124-02においての通電電流値は、4.0 mm²電線相当以下とする。

NOTES

1. MATING PART NO. :7116-4120-02 ETC.
2. ② CURRENT FOR 7114-4124-02 SHALL BE THE CURRENT FOR 4.0 mm² WIRE OR UNDER.



SEC. A-A (5/1)



SEC. B-B (5/1)



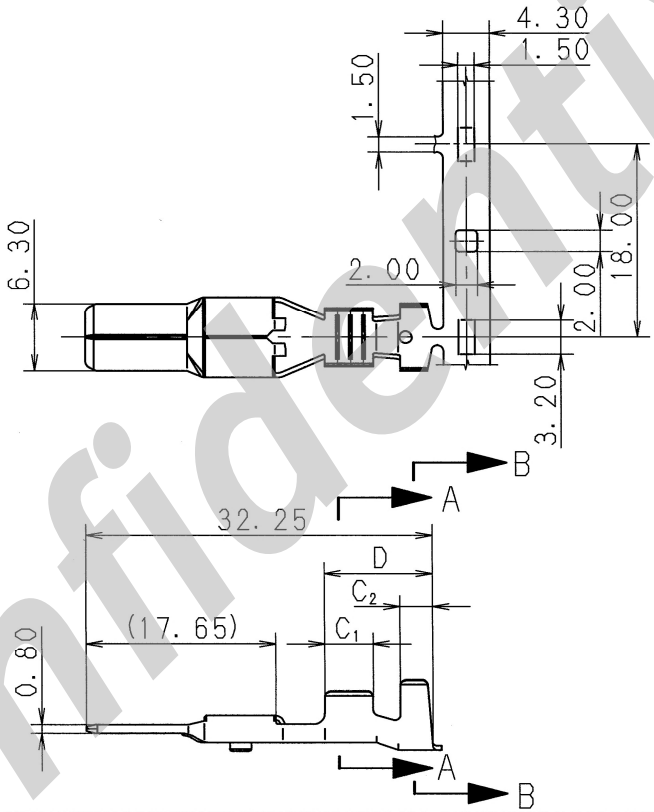

APPLICABLE WIRE SIZE MARK



(7114-4120-02)



(7114-4121-02)



(7114-4122-02)



① (7114-4124-02)

ISSUE MARK

③	03.07.07	CHANGED WIRE SIZE	C03-X435	K.O
②	99.10.21	ADDED DEIMENSION ETC.	C99-M578	M.K
①	97.10.09	ADDED PART NO. ETC.	C97-N130	H.K
	95.08.28	NEW	C95-M160	I.I
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS 9

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	95.08.28	mm	2/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
			SAWAYANAGI	Y. OHKUBO
03.8.20	03.8.20	03.8.19	95.05.29	03.07.07

MATL. COPPER ALLOY t=0.4 SPEC. (TIN PLATING) | TREAT. & FIN.

NAME 6.3 SYSTEM CONNECTOR MALE TERMINAL

PART NO. CH. CODE 7114-4120-02 ETC.

DWG NO. 7114-4120-02:R | SET DWG NO.

YAZAKI CORPORATION

Confidential