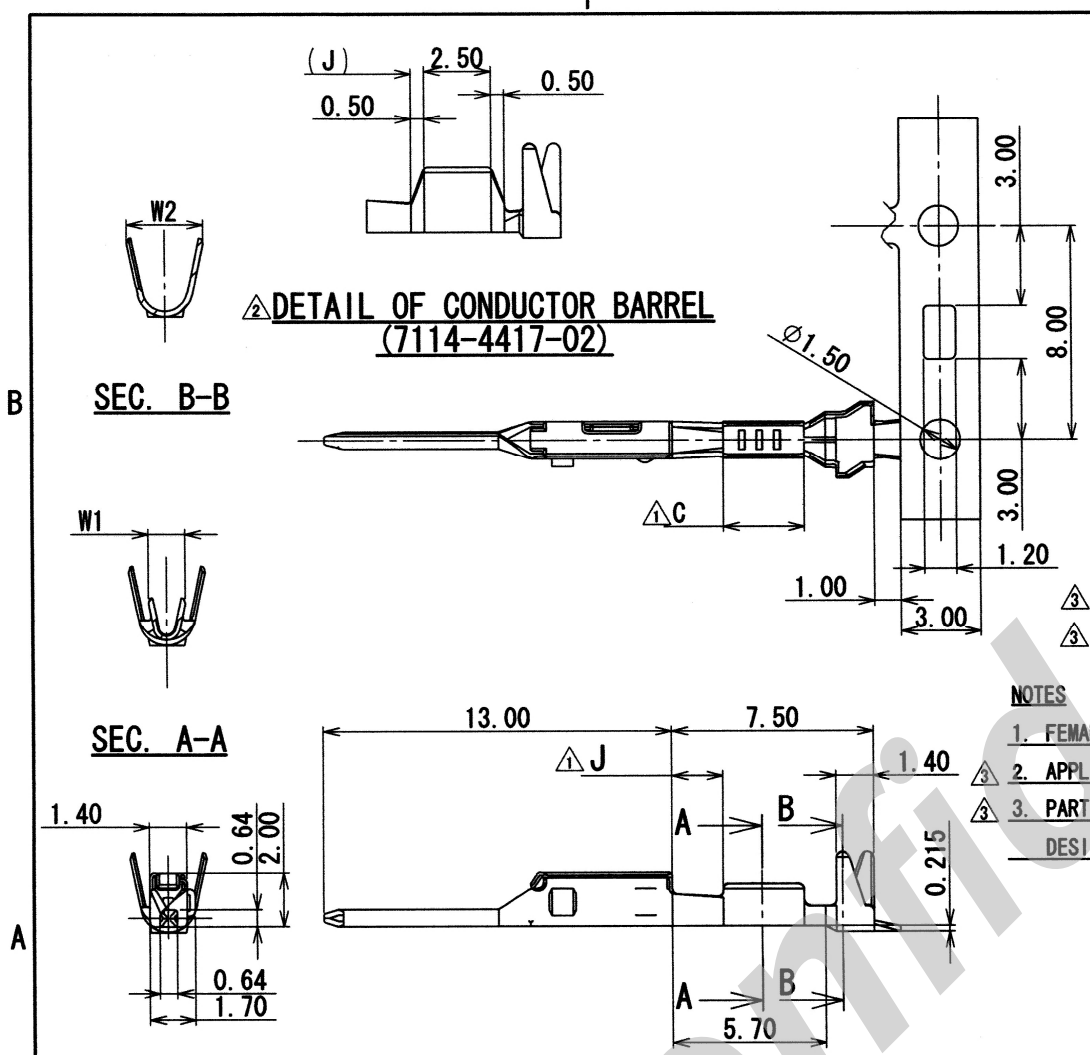

PART NO. AND CH. CODE	△1 C	△1 J	W1	W2	APPLICABLE WIRE SIZE
7114-4415-02	3.0	1.9	1.49	2.82	(CAVUS) 0.3
					(UTW) 0.22～(UTW) 0.35
					(CAVS) 0.3
					△3 (AESSX) 0.3f
7114-4416-02 △3 (7B14-4416-02)	3.0	1.9	1.82	2.94	(CAVUS) 0.5
					(UTW) 0.5
					(CAVS) 0.5
					△3 (AVSSX) 0.5f
					△3 (AESSX) 0.5f
7114-4417-02	△2 SEE DWG	1.65	△2 1.96	3.10	(CAVUS) 0.85
					(UTW) 0.75
					(CAVS) 0.85
					△3 (AVSSX) 0.75f

注記

1. 嵌合雌端子品番： 7116-4415-02, 7116-4416-02, 7116-4417-02
△3 2. 適用ｺﾞﾑ栓品番：7158-3165-90, 7158-3166-60, 7158-3167-80, 7158-3168-80, 7158-3182-20
△3 3. ( )内品番は、エアバッグ(A/B)回路及び特別管理回路に使用する時に使用すること。

NOTES

1. FEMALE COUNTERPART NO. : 7116-4415-02, 7116-4416-02, 7116-4417-02
△3 2. APPLICABLE WIRE SEAL PART NO. : 7158-3165-90, 7158-3166-60, 7158-3167-80, 7158-3168-80, 7158-3182-20
△3 3. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
△3	04.09.03	ADDED PART NO. & NOTES	C04-ZA96	K.N
△2	02.05.28	CHANGED DIMENSION	C02-X535	T.Y
△1	01.10.30	CHANGED DIMENSION	C01-Y113	H.Y
	01.09.10	NEW	C01-X871	H.Y

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	01.09.04	mm	5/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
H. Okuma	N. Sugie	K. Niiho	MURAKAMI YOSHIDA	A. PACABIS ROMEL GAVIZA
04.09.06	04.9.3	04.09.03	01.08.06	04.09.03

MATL. SPEC. △3 BRASS (t=0.2)

TREAT. & FIN. TIN PLATING

NAME RH TYPE TERMINAL MALE

PART NO. CH. CODE 7114-4415-02 ETC.

DWG NO. 7114-4415-02:R

SET DWG NO.

YAZAKI CORPORATION

Confidential