YAZAKI PART NO.	W_1	W_2	③R_1	③R_2	WIRE SIZE
7116-1180 ③(7B16-1180)	2.10	3.70	0.30	0.95	AVS 0.2~0.5 EQUIVALENT
7116-1181 ③(7B16-1181)	3.70	4.20	0.70	1.30	AVS 0.85~1.25 EQUIVALENT

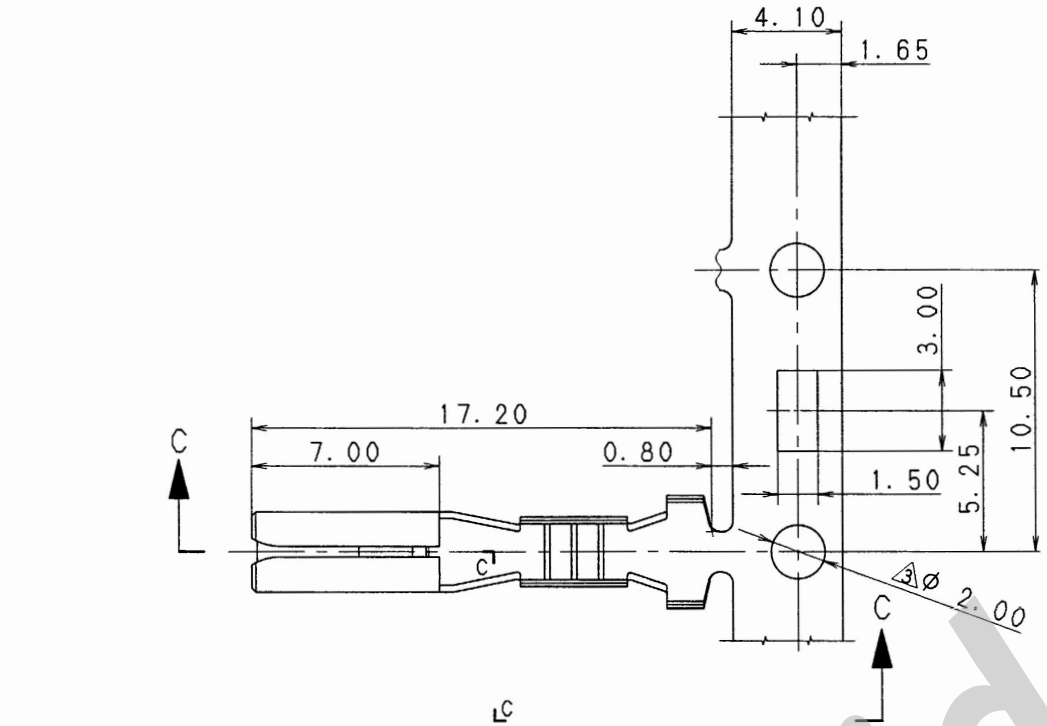





注記

③ 1. ( ) 内品番は、A/B回路及び特別管理回路に使用する時に適用すること。

NOTE

③ 1. ( ) PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

Confidential

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
③	97.02.19	ADDED A/B PART NO.	C97-L247	H.K
②	89.02.21	CHANGED NOTE	C89-6278	K.M
①	86.04.30	CHANGED FORM & RENEW	C86-5493	T.M
	85.02.26	NEW	C85-5204	T.Y

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO.	CUSTOMER DWG NO.
OFFICE	TRIAL PART NO.
VENDOR	
VENDOR NO.	

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	85.02.26	mm	③5/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
97.02.27		86.02.26	81.07.31	97.02.19

MATL. SPEC. BRASS (t=0.25) (TIN PLATING)

TREAT. & FIN.

NAME 090 TERMINAL FEMALE

PART NO. ③7116-1180 ETC. (7B16-1180 ETC.)
CH. CODE

DWG NO. 7116-1180:R

SET DWG NO.

YAZAKI CORPORATION