


PART NO.	W1	W2	H1	H2	MATL. & SPEC.	APPLICABLE WIRE SIZE
7116-1230 (7B16-1230)	2.60	4.20	(2.70)	(3.70)	Sn PLATING	0.3 ~ 0.5 Sq
7116-1231	3.30	5.00	(3.60)	(4.50)	Sn PLATING	0.85 ~ 2 Sq
7116-1230-08	2.60	4.20	(2.70)	(3.70)	Au PLATING	0.3 ~ 0.5 Sq
7116-1231-08	3.30	5.00	(3.60)	(4.50)	Au PLATING	0.85 ~ 2 Sq

注記
 1) かん合雄端子品番: 7114-1230 ETC.
 2) () 内品番は、エアバッグ (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES
 1) MATING MALE TERMINAL NO. : 7114-1230 ETC.
 2) PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

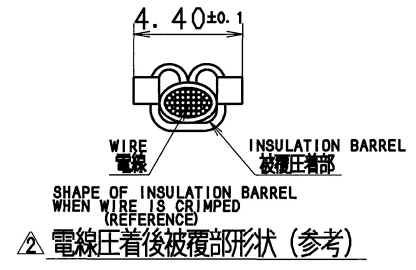

11.10.26		ADDED VIEW ETC.	C11-Z814	K. U	CUSTOMER		MATERIAL SPEC.		TREAT. & FIN.							
93.10.14		ADDED PART NO.	C93-7035	M. K	CUSTOMER PART NO.		△ BRASS (t=0.3)									
89.02.07		NEW	C89-L257	T. M	CUSTOMER DWG NO.		NAME		△ S TYPE TERMINAL FEMALE							
LET	DATE	REVISION RECORD	NO.	CHKD	OFFICE		TRIAL PART NO.									
GENERAL TOLERANCE				VENDOR		VENDOR NO.				ISSUE MARK						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7116-1230 ETC.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	89.02.18	mm	5/1	3	CH. CODE	7116-1230 : R	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7116-1230 : R	
◎	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	M. KASHIYAMA			ISHIZUKA	K. URANO		SET DWG NO.		
SPECIFIED				MASS		g		11.10.26		82.09.14		11.10.26		YAZAKI CORPORATION		