

PART NO. AND CH. CODE	W ₁ ±0.4	W ₂ ±0.4	△H ₁	△H ₂	X	WIRE SIZE
7116-4028-08, □ △(7B16-4028-08)	2.30	5.20	(2.19)	(4.21)	0.50	AVS 0.3~AVS 0.5 EQUIVALENT
7116-4029-08, □ △(7B16-4029-08)	3.00	5.30	(2.91)	(4.08)	0.80	AVS 0.5~AVS 1.25 EQUIVALENT

NOTES

1. MATERIAL : COPPER ALLOY t=0.25

TREATMENT : NICKEL UNDER PLATING

△ GOLD PLATING

△ GOLD FLASH PLATING

△ TIN PLATING

2. MATING PART NO. : 7114-4028-08 ETC.

△ 3. () PART NO. IS USED FOR PARTS

ASSOCIATED WITH AIR BAG (A/B) CIRCUITS

OR OTHER SPECIFIED CIRCUIT.

△ 4. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

注記

1. 材質 : 銅合金 t=0.25

処理 : ニッケル下地めっき

△ 金めっき


△ 金フラッシュめっき

△ 錫めっき


2. 嵌合相手品番 : 7114-4028-08 ETC.

△ 3. () 内品番は、エアバッグ回路及び特別管理回路に使用する時に適用すること。




△ 4. 適用ゴム栓品番 : 7158-3006-90 ETC.



SEC. C-C



SEC. B-B

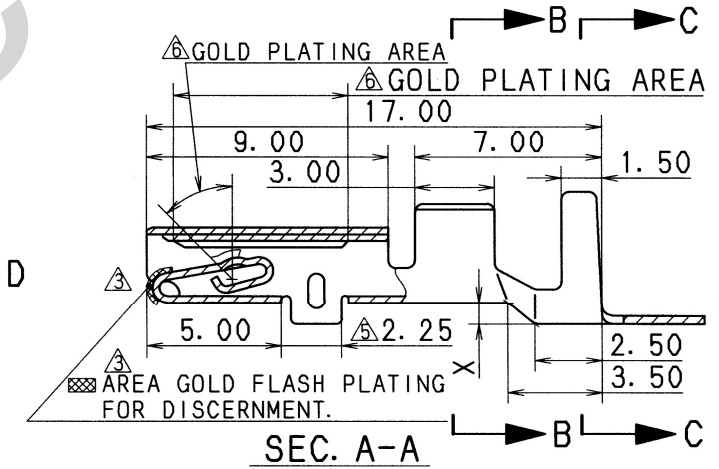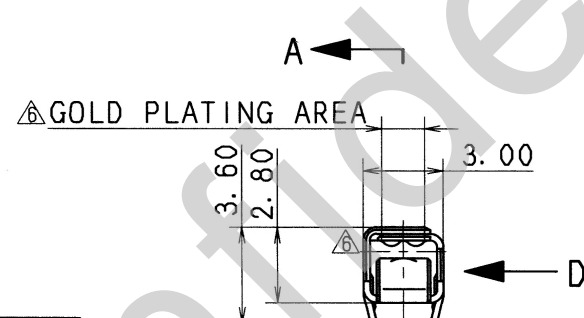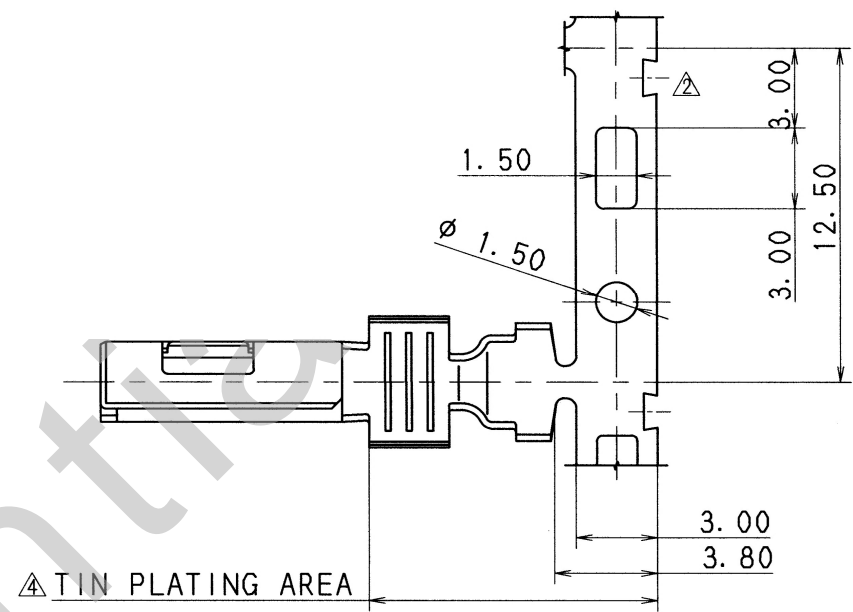

△	01.01.29	CHANGED FORM & ADDED NOTES & CHANGED PLATING. □	C01-X033	E. F
△	98.07.18	CHANGED DIMENSION & NOTES	C97-N458	H. K
△	97.09.12	CHANGED PLATING. □	C97-M928	H. K
△	94.10.31	ADDED PLATING AREA. □	C94-M484	K. O
△	93.08.18	CHANGED FORM	C93-L882	H. F
△	92.03.12	CORRECTED AN ERROR IN WRITING	C92-6321	H. K
△	92.03.10	NEW	C92-6279	H. K
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE					VENDOR NO.		
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED							MASS
							g

CUSTOMER		MATERIAL SPEC.		TREAT. & FIN.	
CUSTOMER PART NO.		SEE NOTES		SEE NOTES	
CUSTOMER DWG NO.		NAME		090II SEALED TERMINAL FEMALE	
OFFICE		NAME		△ (GOLD PLATING)	
TRIAL PART NO.		PART NO.		7116-4028-08 ETC. (7B16-4028-08 ETC.)	
VENDOR		CH. CODE		7116-4028-08:R	
VENDOR NO.		DWG NO.		7116-4028-08:R	
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	92.03.03	mm	5/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
加藤	山梨	福	A. MAEDA	ISHIJIMA	
01.02.06	01.02.05	01.01.31	90.10.18	01.01.29	

ISSUE MARK	
YAZAKI CORPORATION	