




APPLICABLE WIRE SIZE MARK



△ (7116-4105-02)




(7116-4103-02)




(7116-4102-02)


VIEW C



SEC. A-A



SEC. B-B




PART NO. AND CH. CODE	A ₁	A ₂	R ₁	R ₂	H ₁	H ₂	WIRE SIZE (mm ²)
7116-4102-02	2.30	4.75	0.45		(2.30)	(4.25)	△ 0.3 ~ 0.5 EQUIVALENT
7116-4103-02	3.00	4.90	0.60	1.45	(2.95)	(4.40)	△ 0.6 ~ 1.25 EQUIVALENT
△ 7116-4105-02	△ 3.40	4.95	△ 0.80		△ (3.65)	(4.50)	△ 1.50~2.00 EQUIVALENT

注記

- 材質:銅合金 t=0.25
- 適用ゴム検品番 :7158-3030-50 ETC.
- かん合端子品番 :7114-4102-02 ETC.
- 7116-4105-02における通電電流値は、1.0 mm²相当以下とする。

NOTES

- MATERIAL:COPPER ALLOY t=0.25
- APPLICABLE WIRE SEAL NO. :7158-3030-50 ETC.
- MATING TERMINAL NO. :7114-4102-02 ETC.
- CURRENT FOR 7116-4105-02 SHALL BE THE CURRENT FOR 1.0 mm² WIRE OR UNDER.

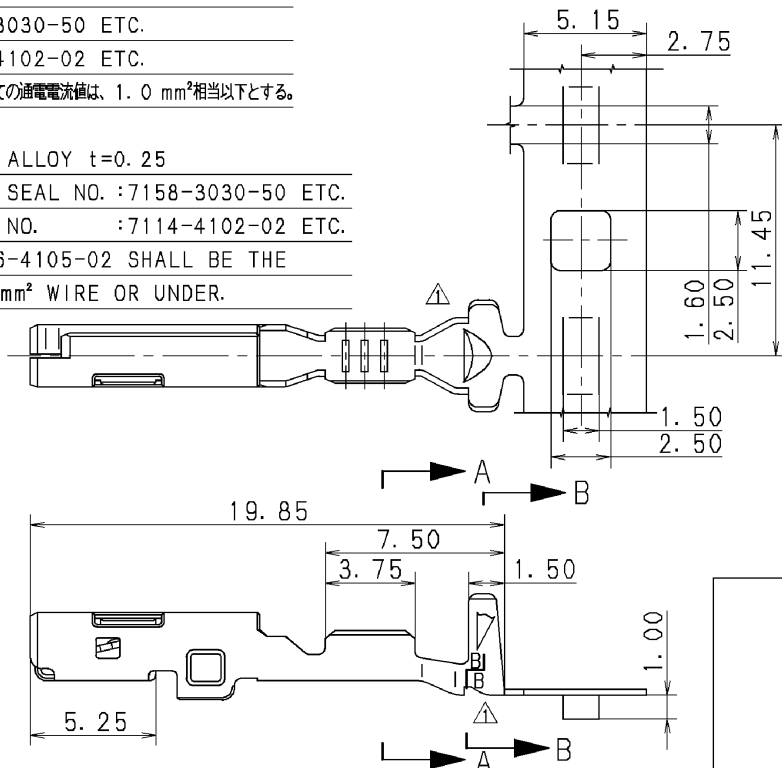

DATE	REVISION RECORD	NO.	CHKD
11.07.10	CORRECTION OF CLERICAL ERROR ETC.	C11-Z461	R. M
03.07.10	CHANGED WIRE SIZE & NOTE	C03-X450	K. O
99.06.18	CHANGED FORM, WIRE SIZE & ADDED NOTE	C99-L931	H. O
97.04.18	ADDED PARTS NO.	C97-6703	Y. T
96.04.16	ADDED NOTES	C96-L510	H. K
96.01.25	CHANGED FORM	C96-6050	Y. T
95.10.25	NEW	C95-6712	Y. T

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED							MASS

CUSTOMER		MATERIAL SPEC.		TREAT. & FIN.	
CUSTOMER PART NO.	CUSTOMER DWG NO.	SEE NOTES			
OFFICE	TRIAL PART NO.	NAME: 1.5 SYSTEM SEALED FEMALE TERMINAL (TIN PLATED)			
VENDOR		PART NO. 7116-4102-02 ETC.			
VENDOR NO.		DWG NO. 7116-4102-02:R SET DWG NO.			
		YAZAKI CORPORATION			

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	95.10.25	mm	5/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
N. SUGIE			Y. TOMITA	R. MAJERANO	
11.07.10			95.10.25	11.07.10	