

PART NO. AND CH. CODE	$\Delta W_1 \pm 0.4$	$H_1$	$\Delta W_2 \pm 0.4$	$H_2$	X	Y	Z	WIRE SIZE	MATERIAL
7116-6045	3.60	$\Delta(3.34)$	5.80	$\Delta(4.93)$	0	0	0	AVS 0.5~AVS 1.25 EQUIVALENT	$\Delta$ C2600 (t=0.40) TIN PLATING
7116-6046	4.90	$\Delta(4.62)$	7.40	$\Delta(6.10)$	0	0	0	AVS 2~AVS 3 EQUIVALENT	$\Delta$ C2600 (t=0.40) TIN PLATING
7116-6047	6.80	$\Delta(6.48)$	9.90	$\Delta(8.29)$	1.10	4.00	5.50	AVS 5~AV 8 EQUIVALENT	$\Delta$ COPPER ALLOY (t=0.40) TIN PLATING

注記


1. 嵌合相手品番: 7114-6045 ETC.

$\Delta$  2. 適用寸法品番: 7158-3022-80 ETC.

NOTES

1. MATING PART NO.: 7114-6045 ETC.

$\Delta$  2. APPLICABLE RUBBER STOPPER NO.: 7158-3022-80 ETC.

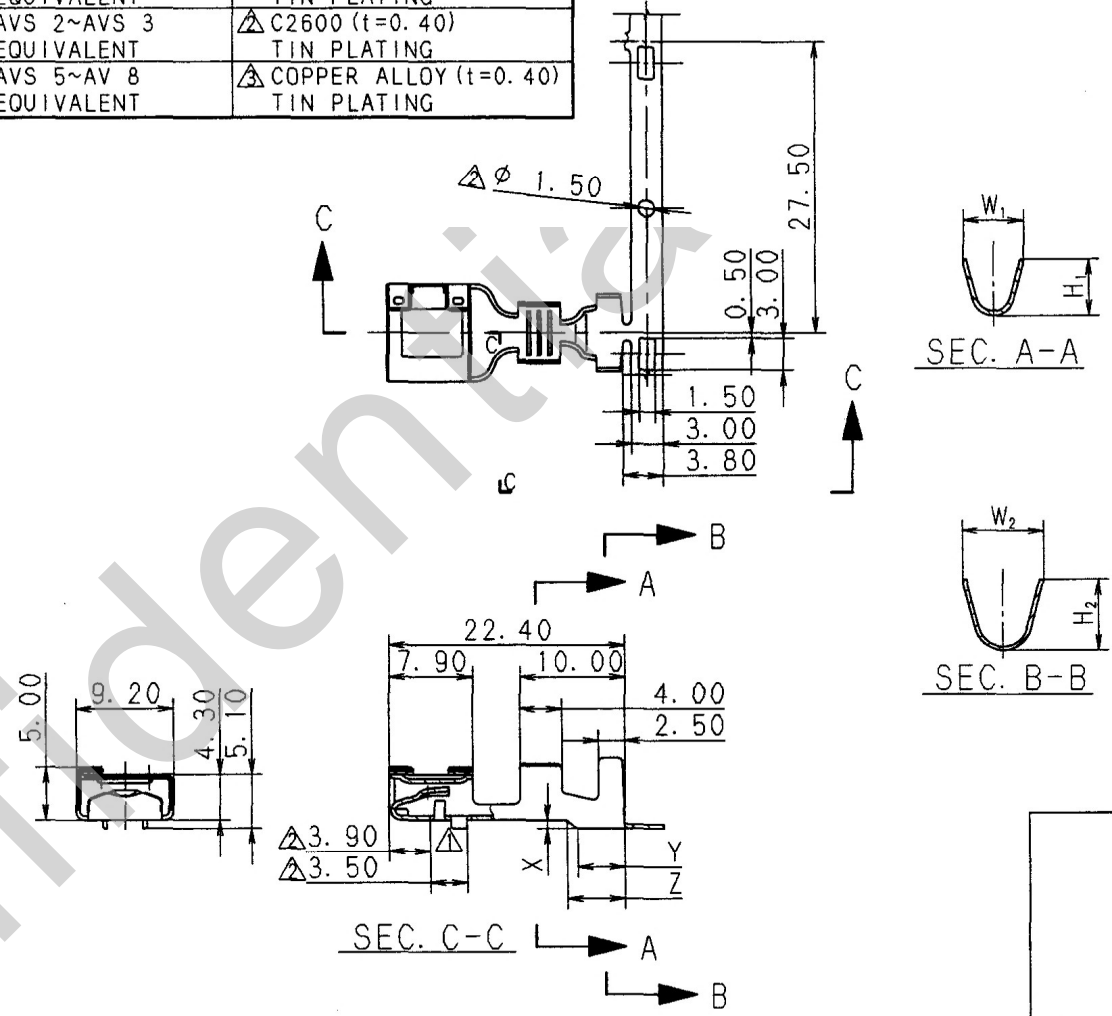

$\Delta$ 00.01.28	CHANGED MATERIAL	C00-L150	C. T			ISSUE MARK	
$\Delta$ 98.08.04	CHANGED NOTES & DIMENSION	C97-N466	H. K	CUSTOMER		MATL. SPEC.	TREAT. & FIN.
$\Delta$ 90.03.06	CHANGED FORM	C90-L254	K. O	CUSTOMER PART NO.		SEE TABLE	
89.10.11	NEW	C89-M090	H. Y	CUSTOMER DWG NO.		NAME 312 SEALED TERMINAL FEMALE	
LET	DATE	NO.	CHKD	TRIAL PART NO.			
GENERAL TOLERANCE			VENDOR NO.				
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	$\pm 0.15$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.75$	$\pm 30'$	0.1
B	$\pm 0.2$	$\pm 0.3$	$\pm 0.55$	$\pm 0.95$	$\pm 1.4$	$\pm 30'$	0.1
(C)	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.4$	$\pm 2$	$\pm 30'$	0.15
SPECIFIED			MASS				
		加藤 山梨		福馬居		SUEYOSHI KIKUCHI	
		00.02.17		00.2.15		00.02.08	
						87.08.08	
						00.01.28	
				PART NO. 7116-6045 ETC.			
				CH. CODE		7116-6045:R	
				DWG NO.		7116-6045:R	
				SET DWG NO.			
YAZAKI CORPORATION							