




注 記

1. 適用マスターミナル品番: 7116-1230 ETC.
2. 数合オスハウジング® 品番: 7122-1683-30
3. 適用リヤホルダ® 品番: 7157-6085-20

 NOTES

1. APPLICABLE FEMALE TERMINAL NO. :7116-1230 ETC.
2. MATING MALE HOUSING NO. :7122-1683-30
3. APPLICABLE REAR HOLDER NO. :7157-6085-20

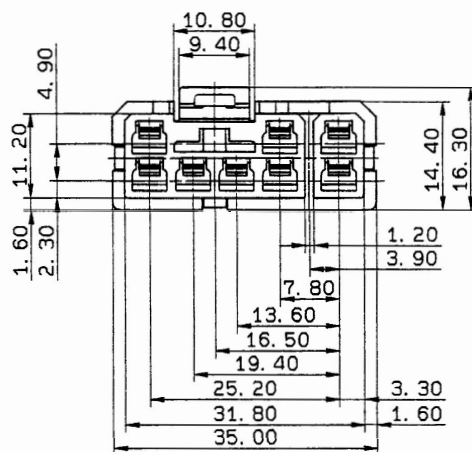

A	90.02.16	RENEW	C89-M243	M. K
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°
⊙	±0.3	±0.5	±0.8	±1.4	±2	±30°
SPECIFIED						WEIGHT

CUSTOMER					MATERIAL					TREAT.					ISSUE MARK				
CUSTOMER PART NO.					CUSTOMER DWG NO.					SPEC.					NYLON 6 (BLACK) & FIN.				
OFFICE					STDLIB NO.					NAME					S TYPE CONNECTOR				
VENDOR																			
VENDOR NO.															HOUSING 8PF(B)				
DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE		PART NO.							
R		RENEW		83.03.04		mm		2/1		3		7123-1683-30							
APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO.		7123-1683-30:R		TRIAL PART NO.					
[Signature]		[Signature]		[Signature]		INABA		M. KAI											
90.2.22		90.2.22		90.2.22		83.03.04		90.02.16						YAZAKI CORPORATION					