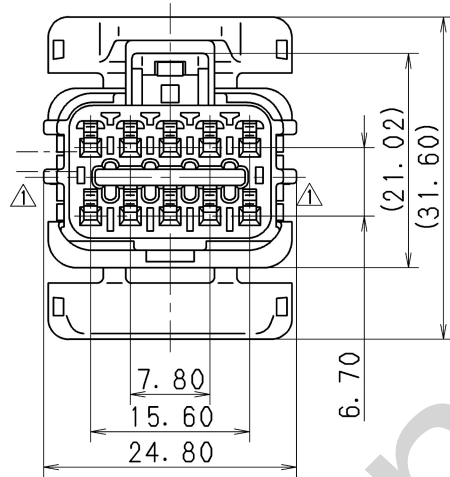



#### 注 記

1. かん合相手品番 : 7222-6504-40
2. 適用端子品番 : 7116-1467-02 ETC.
3. 適用ゴム栓品番 : 7157-3976-60 ETC.

#### NOTES

1. MATING PART NO. : 7222-6504-40
2. APPLICABLE TERMINAL NO. : 7116-1467-02 ETC.
3. APPLICABLE SEAL RUBBER NO. : 7157-3976-60 ETC.

ISSUE MARK

|            |  |  |  |                                               |  |  |  |                                             |  |  |  |                    |  |  |  |
|------------|--|--|--|-----------------------------------------------|--|--|--|---------------------------------------------|--|--|--|--------------------|--|--|--|
|            |  |  |  | CUSTOMER                                      |  |  |  | MATL. SPEC.                                 |  |  |  | TREAT. & FIN.      |  |  |  |
| 10. 11. 15 |  |  |  | CHANGED PART NAME                             |  |  |  | PBT (GRAY)                                  |  |  |  |                    |  |  |  |
| 95. 09. 27 |  |  |  | CHANGED FORM. [A]                             |  |  |  |                                             |  |  |  |                    |  |  |  |
| 95. 05. 11 |  |  |  | NEW                                           |  |  |  |                                             |  |  |  |                    |  |  |  |
| LET        |  |  |  | REVISION RECORD                               |  |  |  | NAME [A] RV-TYPE 10P FEMALE                 |  |  |  |                    |  |  |  |
|            |  |  |  | NO.                                           |  |  |  | (GY) HOUSING                                |  |  |  |                    |  |  |  |
|            |  |  |  | CHKD                                          |  |  |  |                                             |  |  |  |                    |  |  |  |
|            |  |  |  | VENDOR NO.                                    |  |  |  |                                             |  |  |  |                    |  |  |  |
|            |  |  |  | GENERAL TOLERANCE                             |  |  |  | PART NO.                                    |  |  |  | 7123-6504-40, [A]  |  |  |  |
|            |  |  |  | 10MAX 50MAX 100MAX 250MAX 2500VR ANGLE ECCENT |  |  |  | CH. CODE                                    |  |  |  |                    |  |  |  |
|            |  |  |  | A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30' 0.1         |  |  |  | DWG TYPE DWG SOURCE DWG DATE UNIT SCL ANGLE |  |  |  | 7123-6504-40:R     |  |  |  |
|            |  |  |  | B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±30' 0.1         |  |  |  | R NEW 95.05.11 mm 2/1 3                     |  |  |  |                    |  |  |  |
|            |  |  |  | C ±0.3 ±0.5 ±0.8 ±1.4 ±2 ±30' 0.15            |  |  |  | APPROVED CHECKED CHECKED DESIGN DRAWN       |  |  |  |                    |  |  |  |
|            |  |  |  | SPECIFIED MASS                                |  |  |  | S. MIZUSE R. CABANGAL KOUMATSU G. MAGNAYON  |  |  |  |                    |  |  |  |
|            |  |  |  |                                               |  |  |  | 10. 11. 15 10. 11. 15 95. 05. 11 10. 11. 15 |  |  |  | YAZAKI CORPORATION |  |  |  |