

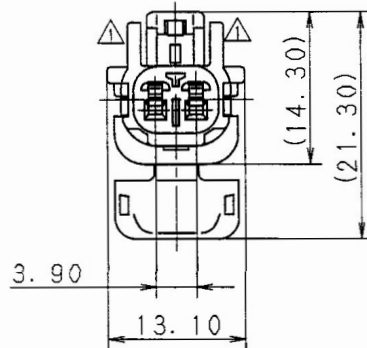


注 記

- △ 1. 嵌合相手品番 : 7222-6524-40 (7C22-6524-40)
△ 2. 適用端子品番 : 7116-1767-02 (7B16-1767-02) ETC.
△ 3. 適用ゴム検品番 : 7157-3976-60, 7157-3977-50 (7B57-3977-50)
△ 4. () 内品番は、エアバッグ (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES

- △ 1. MATING PART NO. : 7222-6524-40 (7C22-6524-40)
△ 2. APPLICABLE TERMINAL NO. : 7116-1767-02 (7B16-1767-02) ETC.
△ 3. APPLICABLE SEAL RUBBER NO. : 7157-3976-60, 7157-3977-50 (7B57-3977-50)
△ 4. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.



ISSUE MARK

△ 98.10.27		ADDED A/B PART NO.		C98-M820	K. U	CUSTOMER		MATL. SPEC.			PBT (LIGHT GRAY)		TREAT. & FIN.			
△ 96.10.22		CHANGED FROM, [A]		C96-M387	H. A	CUSTOMER PART NO.		CUSTOMER DWG NO.								
93.05.10		NEW		C93-L528	H. F	OFFICE		TRIAL PART NO.			NAME RV-TYPE CONNECTOR					
LET	DATE	REVISION RECORD		NO.	CHKD	VENDOR		VENDOR NO.			2PF (GY) HOUSING					
GENERAL TOLERANCE																
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCI	ANGLE	PART NO.	△7123-6524-40 (7B23-6524-40), [A]	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	93.05.10	mm	2/1	3	CH. CODE		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7123-6524-40:R	SET DWG NO.
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				K. ABE	YOSHIDA				
SPECIFIED						MASS								YAZAKI CORPORATION		