
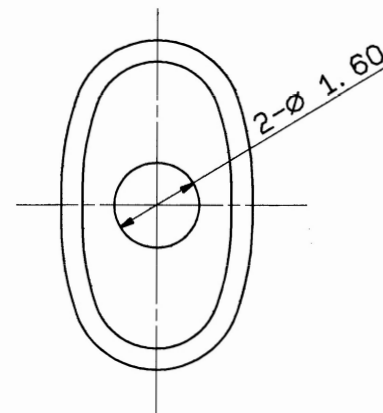
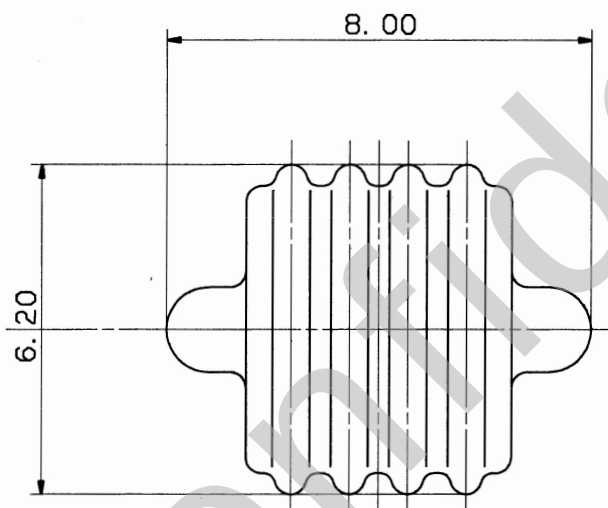


RUBBER PART GENERAL TOLERANCE

PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

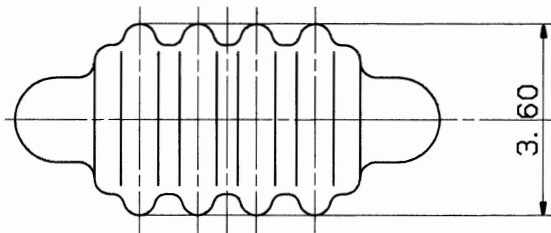

注 記

- 適用コネクタ品番: 7222-6524-40 ETC.
- ゴム材料: 含油シリコンゴム (薄青)

NOTES

- APPLICABLE CONNECTOR NO. : 7222-6524-40 ETC.
- RUBBER MATERIAL : SELF LUBRICATION SILICONE RUBBER
(LIGHT BLUE)

ISSUE MARK

94. 03. 31		NEW		C94-L452	S. K	CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATL. SPEC. SEE NOTES		TREAT. & FIN.	
LET	DATE	REVISION RECORD		NO.	CHKD	OFFICE		TRIAL PART NO.		NAME		SEALED PLUG FOR RV-TYPE			
GENERAL TOLERANCE						VENDOR		VENDOR NO.							
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7157-3990-90
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	94. 03. 30	mm	10/1	3	CH. CODE	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO.	7157-3990-90:R	
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15			K. ABE		SHIBATA			
SPECIFIED						MASS		ハ木		阿部		94. 3. 31		94. 3. 31	
						g		94. 3. 31		94. 3. 31		91. 10. 08		94. 03. 31	
														YAZAKI CORPORATION	