
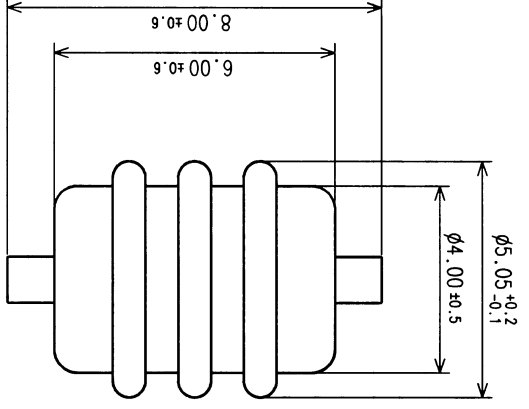


CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATERIAL SPEC.		SEE NOTES		TREAT & FIN.		ISSUE MARK	
-		-		-		-		-		-		-	
LET	DATE	REVISION RECORD		OFFICE		TRIAL PART NO.		NAME		SEALING REDUCED PITCH		SEALING CONNECTOR CAVITY PLUG	
-	02.03.05	NEW		C.B.		-		1.5mm YES		-		-	
GENERAL TOLERANCE		NO.		CHKD		VENDOR		VENDOR NO.		ECCENT		ANGLE	
10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	ANGLE	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. 7158-3037-70	
±0.15	±0.2	±0.3	±0.5	±0.75	±0.1	R	7158-3037-70:M (NEW)	02.03.05	MM	10/1	3	DWG NO. 7158-3037-70:R	
8	±0.2	±0.3	±0.55	±0.95	±1.4	APPROVED	CHECKED	DESIGN	DRAWN	A. HAYS		DWG NO. 7158-3037-70:R	
① ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	0.1	0.1	0.15	WEIGHT		SPECIFIED	
03.16.05		03.16.05		03.16.05		03.16.05		03.16.05		03.16.05		03.16.05	
YAZAKI CORPORATION		YAZAKI CORPORATION		YAZAKI CORPORATION		YAZAKI CORPORATION		YAZAKI CORPORATION		YAZAKI CORPORATION		YAZAKI CORPORATION	



- NOTES
- PARTS MUST BE PURCHASED FROM YAZAKI.
 - PARTS MUST BE FREE OF FLASH AND IMPERFECTIONS THAT AFFECT FUNCTION.
 - MATERIAL: SILICONE RUBBER
 - COLOR: YELLOW
 - APPLICABLE TEMPERATURE: UP TO 125° C.

ISSUE MARK