



RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	±0.2	±0.3	±0.4	
3 TO 6	±0.2	±0.4	±0.5	
6 TO 10	±0.3	±0.5	±0.6	
10 TO 18	±0.3	±0.6	±0.8	
18 TO 30	±0.4	±0.8	±1.0	
30 TO 50	±0.5	±1.0	±1.5	
50 TO 80	±0.6	±1.2	±2.0	
80 TO 120	±0.7	±1.4	±2.5	
120 TO 180	±0.8	±1.6	±3.0	
180 TO 250	±1.0	±2.0	±4.0	
250 TO 315	±1.2	±2.5	±5.0	
315 TO 400	±1.5	±3.0	±6.0	
400 TO 500	±1.8	±3.5	±7.0	
500 OVER	±0.4 %	±0.8 %	±1.5 %	

注記

- △ 1. 適用電線サイズ : AVSS/GAVS 0.3~0.5  
 \_\_\_\_\_  
 CIVUS 0.35~0.5  
 \_\_\_\_\_  
 IVSSH 0.35f~0.5f  
 \_\_\_\_\_  
 CHFUS 0.35~0.5  
 \_\_\_\_\_  
 HFSS 0.5  
 \_\_\_\_\_
- △ 2. ( )内品番は、エアバック(A/B)回路及び特別管理回路に使用する時に適用すること。

NOTES

- △ 1. APPLICABLE WIRE SIZE : AVSS/GAVS 0.3~0.5  
 \_\_\_\_\_  
 CIVUS 0.35~0.5  
 \_\_\_\_\_  
 IVSSH 0.35f~0.5f  
 \_\_\_\_\_  
 CHFUS 0.35~0.5  
 \_\_\_\_\_  
 HFSS 0.5  
 \_\_\_\_\_
- △ 2. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

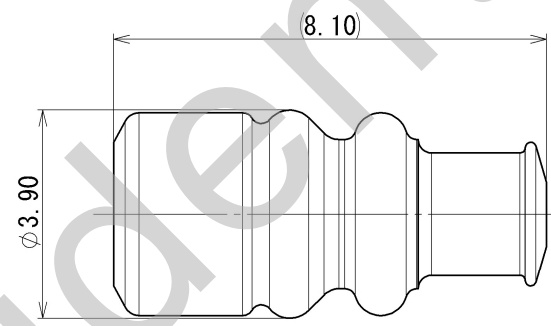

ISSUE MARK

△	2018/09/28	ADDED APPLICABLE WIRE SIZE, ETC.	C18-P258	Y. M	CUSTOMER	MATL. SILICONE RUBBER	TREAT. & FIN.
△	2004/11/15	CHANGED NOTE & NAME	C04-ZC70	T. H	CUSTOMER PART NO.	SPEC. (DARK BROWN)	
	1996/09/16	NEW	C96-M720	M. T	CUSTOMER DWG NO.		
LET	DATE	REVISION RECORD	NO.	CHKD	OFFICE	NAME △ 1.0Ⅲ RUBBER STOPPER (S SIZE)	
		GENERAL TOLERANCE			TRIAL PART NO. or PRODUCT NO.		
					VENDOR		
					VENDOR NO.		
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.5°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±1.0°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±1.5°	0.15
SPECIFIED				MASS	△ (0.1) g		
					DWG TYPE	DWG SOURCE	DWG DATE
					R	NEW	1996/09/10
					UNIT	SCL	ANGLE
					mm	10:1	3
					APPROVED	CHECKED	CHECKED
					DESIGN	DRAWN	
					N. TAGUCHI	K. FUKUDA	E. SUZUKI
					Y. MAEDA		
					2018/09/28	2018/09/28	1995/10/18
					2018/09/28		2018/09/28
						PART NO. 7158-3070-80 (7B58-3070-80)	SET DWG NO.
						DWG NO. 7158-3070-80:R	
						<b>YAZAKI Corporation</b>	