

RUBBER PART GENERAL TOLERANCE	
0 TO 3	± 0.4
3 TO 6	± 0.5
6 TO 10	± 0.6
10 TO 18	± 0.8
18 TO 30	± 1.0
30 TO 50	± 1.5
50 TO 80	± 2.0
80 TO 120	± 2.5
120 TO 180	± 3.0
180 TO 250	± 4.0
250 TO 315	± 5.0
315 TO 400	± 6.0
400 TO 500	± 7.0
500 OVER	$\pm 1.5 \%$

NOTES:

1. MATERIAL : SILICONE RUBBER

COLOR: BLACK

2. APPLICABLE POWER WIRE: CHAMPLAIN 3sq , EEHX 5sq.

3. THIS PART MUST COMPLY WITH "CONTROL STANDARD FOR CHEMICAL SUBSTANCE (YGS-C21-010)".




技术要求

1. 材质: SILICONE RUBBER

颜色：黑色

2. 适用电线: CHAMPLAIN 3sq, $\triangle$ EHX 5sq.

△ 3. 化学物質管理基準 (YGS-C21-010) に準ずる事。

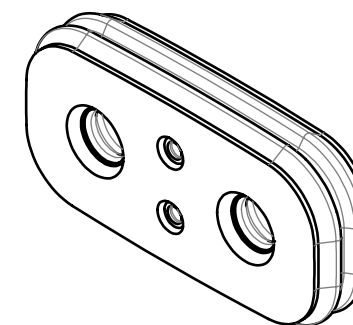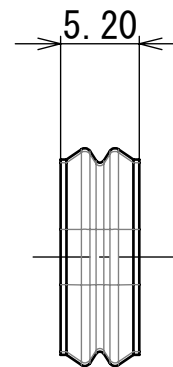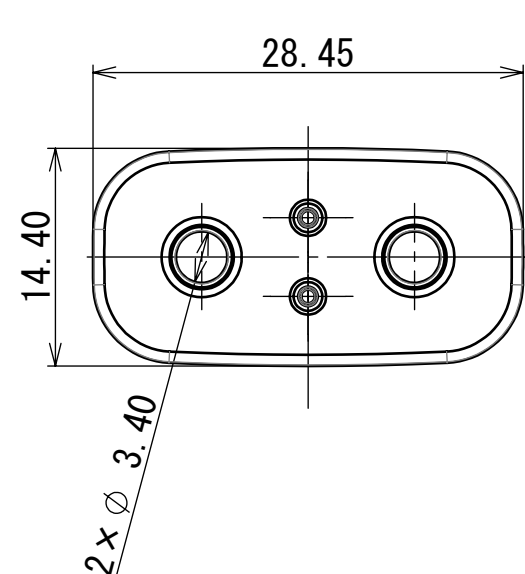

REFERENCE

ISSUE MARK

					CUSTOMER				MATL. SPEC.				SEE NOTES				TREAT. & FIN.								
					CUSTOMER PART NO.				CUSTOMER DWG NO.																
					OFFICE				TRIAL PART NO.				NAME HV 4.8 CONNECTOR 2P RUBBER (FOR O. D. ϕ 4.52)												
					VENDOR				X31737-T718																
					VENDOR NO.																				
		2019/12/04		NOTES CHANGE		C19-T239		S. HT		DWG TYPE R		DWG SOURCE NEW		DWG DATE 2017/11/25		UNIT mm		SCL 5:1		ANGLE 3		PART NO. 7172-5731-30			
		2019/04/11		NEW		C19-T062		Z. C		APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		CH. CODE					
LET		DATE		REVISION RECORD		NO.		CHKD		CHEN. HJ		ZENG. GF		FAN. LJ		ZHANG. C		SHEN. HT		DWG NO. 7172-5731-30:R					
SPECIFIED						MASS 2.0 g				2019/12/04		2019/12/04		2019/12/04		2017/11/25		2019/12/04		SET DWG NO.					
																				YAZAKI CORPORATION				A3	

YAZAKI CORPORATION