
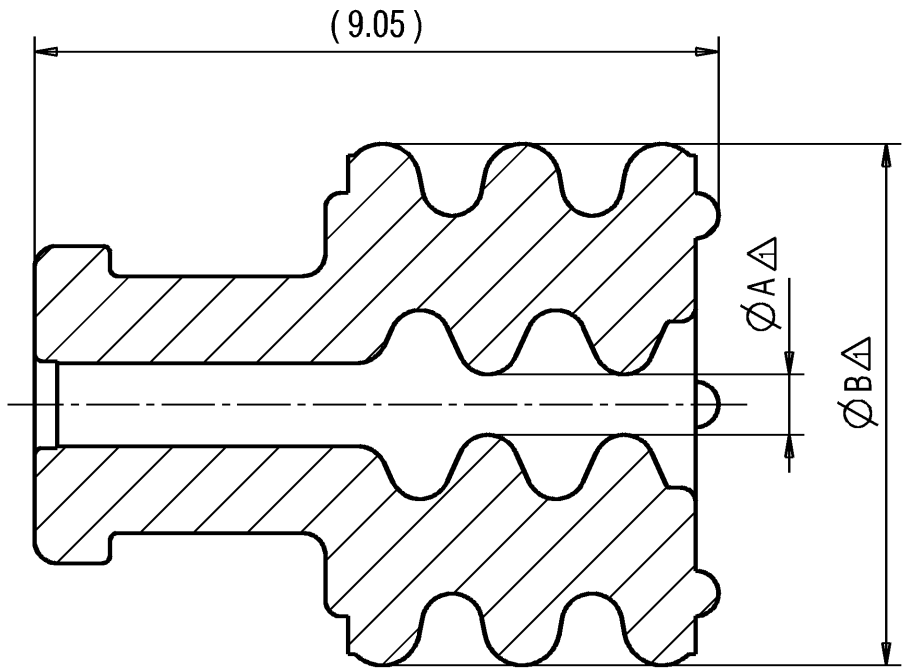


NOTES:
△ 1. MATERIAL: SEE TABLE;
△ 2. COLOR: SEE TABLE;
3. APPLICABLE TERMINALS: 7114-4150-02, ETC.,
7116-4150-02, ETC.;
4. APPLICABLE FOR CONNECTOR CAVITY DIAMETER 6.10 mm;
5. RUBBER PARTS GENERAL TOLERANCE ±0.2 mm;
△ 6. THE MATERIALS USED IN THIS PRODUCT ARE IN CONFORMITY WITH
REQUIREMENTS OF EU ELV 2000/53/EC DIRECTIVE AND ASSOCIATED DOCUMENTS.


PART NUMBER	MATERIAL	COLOUR	A △ [mm]	B △ [mm]	WIRE OUTER DIAMETER RANGE [mm]	WEIGHT △ [g]
			7158-3111-60	Φ 6.90	1.2 ~ 1.9	0.191
			7158-3112-70		△ 1.7 ~ 2.3	0.184
			7158-3113-40		2.1 ~ 3.0	0.179
			7158-3113-90		2.1 ~ 3.0	0.179
			7158-3110-40	Φ 6.70	3.1 ~ 3.3	0.164
			7172-5734-80		3.4 ~ 3.7	0.120

B

A

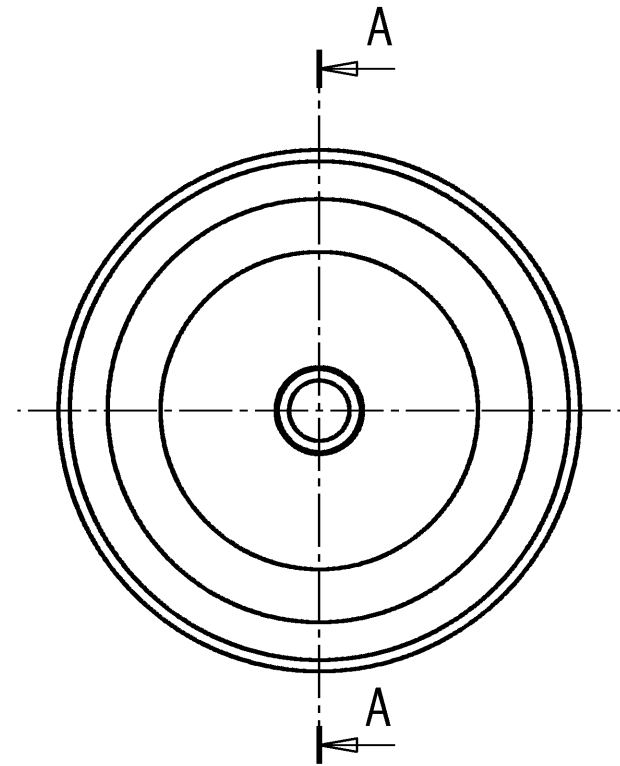

SECTION A-A

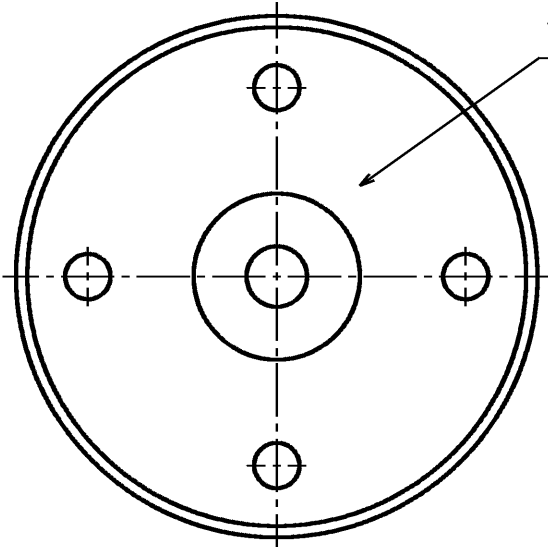

MARKINGS ON THIS SIDE
(CAVITY NO., MOLDING NO.,
YAZAKI MARK)

B

A

	28.10.2024.	REPLACED PN	Y24-0583	S.P.											ISSUE MARK			
	20.10.2022.	ADDED PN	Y22-0717	M.C.	CUSTOMER										MATL. SPEC. SEE TABLE		TREAT. & FIN.	
	29.3.2021.	CHANGED TABLE	Y21-0222	M.C.	CUSTOMER PART NO.					CUSTOMER DWG NO.								
	20.9.2017.	CHANGED DRAWING & TABLE, ADD PART NUMBERS	Y17-939	I.J.											NAME 2.8 SYSTEM SEALED CONNECTOR			
—	23.2.1999.	NEW	C99-E013	G.N.	OFFICE YEL-K					TRIAL PART NO.					WIRE SEAL			
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR					7F9457-9338, etc.								
GENERAL TOLERANCE										VENDOR NO.								
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. 7158-3111-60, ETC.				
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	22.2.1999.	mm	10/1	3	CH. CODE				
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO. 7158-3111-60: R		SET DWG NO.		
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	G. GREGURIC	I. JAKOPLIC	F. SIMONEK	IWAHORI	S. PERIC						
SPECIFIED							MASS	SEE TABLE				21.5.1996.		28.10.2024.				

1

2

3