
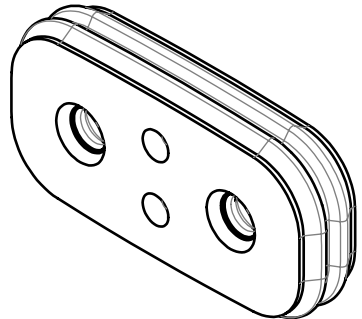
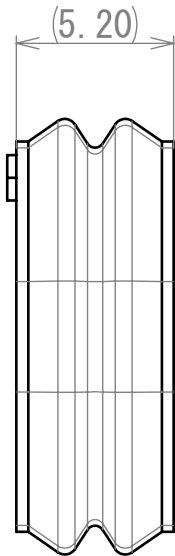


RUBBER PART GENERAL TOLERANCE		
0 TO	3	± 0.4
3 TO	6	± 0.5
6 TO	10	± 0.6
10 TO	18	± 0.8
18 TO	30	± 1.0
30 TO	50	± 1.5
50 TO	80	± 2.0
80 TO	120	± 2.5
120 TO	180	± 3.0
180 TO	250	± 4.0
250 TO	315	± 5.0
315 TO	400	± 6.0
400 TO	500	± 7.0
500 OVER		± 1.5 %

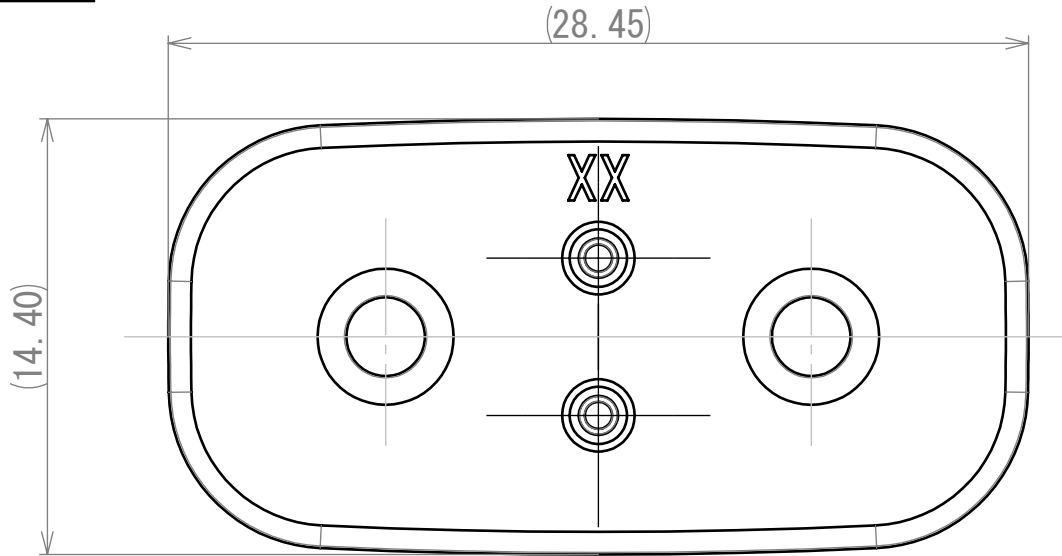

REFERENCE

NOTES

1. MATERIAL: SILICONE RUBBER
COLOR: DARK GRAY
2. APPLICABLE POWER WIRE: ISO 5sq UNSHIELD CABLE
3. THIS PART MUST COMPLY WITH "CONTROL STANDARD FOR
CHEMICAL SUBSTANCE (Y_X-QM-xx-Y-006)".

技术要求

1. 材质 : SILICONE RUBBER
颜色 : 深灰色
2. 适用电线: ISO 5sq UNSHIELD CABLE
3. 满足化学物质管理基准 (Y_X-QM-xx-Y-006)

CUSTOMER				MATL. SPEC.				TREAT. & FIN.			
CUSTOMER PART NO.				CUSTOMER DWG NO.				SEE NOTES			
OFFICE				TRIAL PART NO.				NAME			
VENDOR				X32385-T211				HV 4.8 CONNECTOR 2P			
VENDOR NO.								RUBBER TYPE C			
DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE	
R		NEW		2023/11/29		mm		4:1		3	
APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		PART NO.	
CHEN. HJ		-		FAN. LJ		FAN. LJ		LI. Q		7172-6249-10	
2023/11/29				2023/11/29		2023/7/17		2023/11/29		DWG NO.	
										7172-6249-10:R	
										SET DWG NO.	
										YAZAKI (CHINA) INVESTMENT CORPORATION	

ISSUE MARK

2023/11/29		NEW		C23-T282	
LET		DATE		NO.	
SPECIFIED		REVISION RECORD		CHKD	
		MASS		1.93g	

A3