
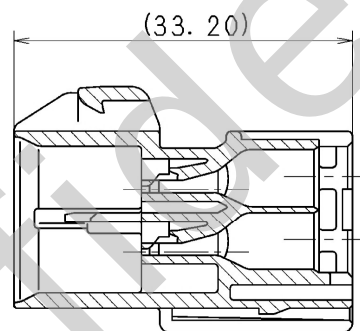
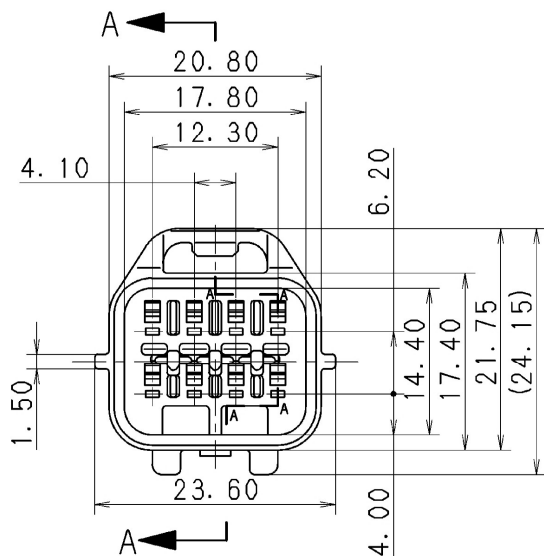


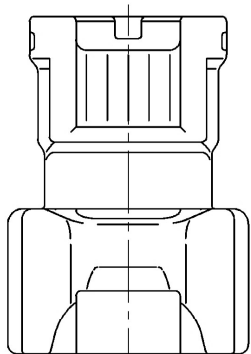

SEC. A-A

注 記

- △ 1. 通用端子品番: 7114-1680-02, 7114-1680-08
2. 通用ゴム栓品番: 7157-3950-80, 7157-3951-60
7157-3952-80
3. 通用リヤホルダ品番: 7157-4606-80
4. かん合相手品番: 7283-8780-30

NOTES

- △ 1. APPLICABLE TERMINAL NO. : 7114-1680-02, 7114-1680-08
2. APPLICABLE SEAL RUBBER NO. : 7157-3950-80, 7157-3951-60
7157-3952-80
3. APPLICABLE REAR HOLDER NO. : 7157-4606-80
4. MATING PART NO. : 7283-8780-30

ISSUE MARK

								CUSTOMER				MATL. SPEC. PBT (BLACK)				TREAT. & FIN.			
⚠	10. 11. 15	CHANGED PART NAME		C10-ZB05	J. C	CUSTOMER PART NO.		CUSTOMER DWG NO.											
⚠	95. 07. 11	CHANGED NOTES		C95-M039	A. H											NAME ⚠ SSD TYPE HOUSING 8P MALE			
	91. 02. 08	NEW		C91-L162	M. S	OFFICE		TRIAL PART NO.											
LET	DATE	REVISION RECORD		NO.	CHKD	VENDOR		7F8922-6820											
GENERAL TOLERANCE						VENDOR NO.													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.					
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	91.02.08	mm	2/1	3	CH. CODE	7182-8780-30				
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7182-8780-30:R				
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	S. MIZUSE		R. CABANGAL	KANEKO	J. CANDO							
SPECIFIED						MASS		10. 11. 15		10. 11. 15	89. 11. 01	10. 11. 15	YAZAKI CORPORATION						