GENERAL TOLERANCE										
10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
±0.3	±0.5	±0.8	±1.4	±2	±0.2	±0.3	±0.5	±2.5	±3°	0.15

技术要求

1. 材料：铜合金

   表面处理：镀锡

2. 适用电线：3 ～ 5 sq

NOTES

1. MATERIAL : COPER ALLOY

   TREATMENT: Sn PLATING

2. APPLICABLE WIRE SIZE : 3 ～ 5 sq

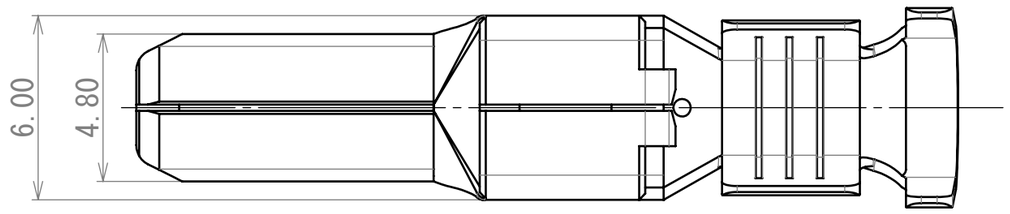

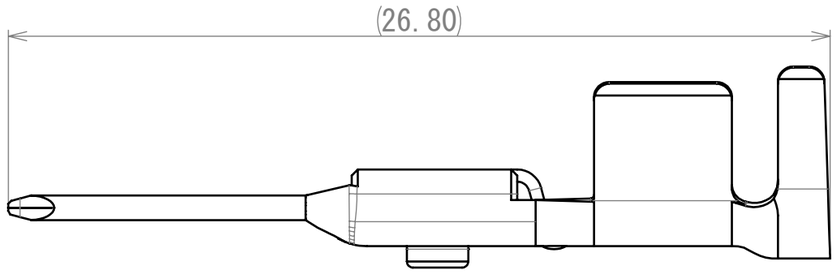

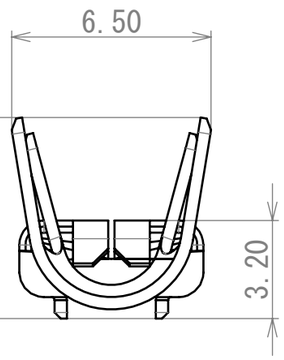



REFERENCE

ISSUE MARK

CUSTOMER									MATL. SPEC.	SEE NOTES	TREAT. & FIN. SEE NOTES
CUSTOMER PART NO.			CUSTOMER DWG NO.						NAME	HV 4.8 CONNECTOR 2P	
										TERMINAL MALE	
OFFICE			TRIAL PART NO.								
VENDOR			X31725-T489/X31425-T241								
VENDOR NO.											
			DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. CH. CODE	7185-0905-02	
			R	NEW	2015/03/27	mm	5:1	3			
	2019/04/11	NEW	C19-T062	Z.C	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO.	7185-0905-02:R	SET DWG NO.
LET	DATE	REVISION RECORD	NO.	CHKD	CHEN.HJ	ZENG.GF	FAN.LJ	FAN.LJ	TANG.EL			
SPECIFIED			MASS 1.0g		2018/11/07	2018/11/07	2018/11/07	2015/03/27	2018/11/07	YAZAKI CORPORATION		A3