

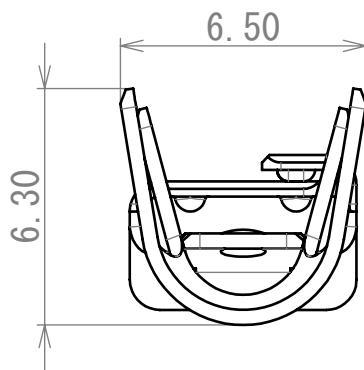
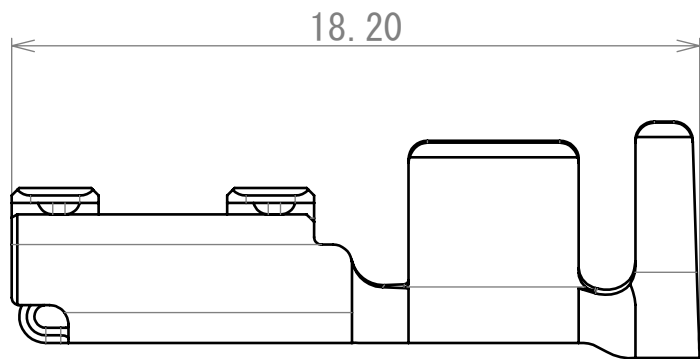


GENERAL TOLERANCE										
10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
±0.3	±0.5	±0.8	±1.4	±2	±0.2	±0.3	±0.5	±2.5	±3°	0.15

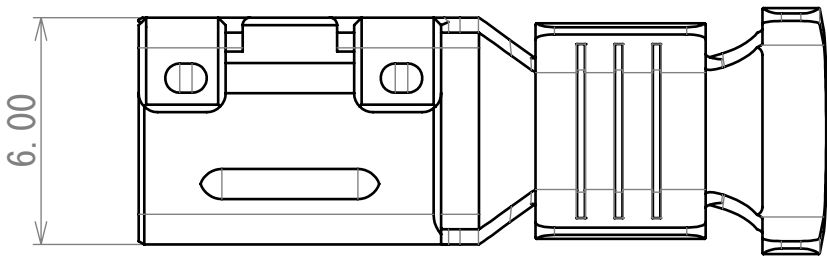

REFERENCE

技术要求

1. 材料：铜合金
- 表面处理：镀锡
2. 适用电线：3 ~ 5 sq

NOTES

1. MATERIAL : COPPER ALLOY
- TREATMENT: Sn PLATING
2. APPLICABLE WIRE SIZE : 3 ~ 5 sq

					CUSTOMER					MATL. SPEC.			SEE NOTES		TREAT. & FIN.		SEE NOTES		
					CUSTOMER PART NO.			CUSTOMER DWG NO.											
					OFFICE			TRIAL PART NO.					NAME HV 4.8 CONNECTOR 2P ----- TERMINAL FEMALE						
					VENDOR			X31585-T184/X31585-T227											
VENDOR NO.																			
					DWG TYPE		DWG SOURCE		DWG DATE		UNIT	SCL	ANGLE	PART NO. 7185-0906-02					
					R		NEW		2015/03/27		mm	5:1	3	CH. CODE					
	2019/04/11	NEW		C19-T062	Z. C	APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO. 7185-0906-02:R			
LET	DATE	REVISION RECORD		NO.	CHKD	CHEN. HJ		ZENG. GF		FAN. LJ		FAN. LJ		TANG. EL		SET DWG NO.			
SPECIFIED				MASS	0. 9g	2018/11/07		2018/11/07		2018/11/07		2015/03/27		2018/11/06		YAZAKI CORPORATION			
A3																			