


SUB ASS'Y PART NO.	NO.	PART NO.	MATERIAL	COLOR	QTY.
7222-6585-80, A	①	7122-6585-80	PBT	BROWN	1
	②	7137-2588-80	SELF-LUBRICATING SILICONE RUBBER	BROWN	1

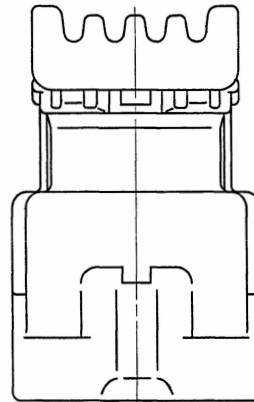


注 記


1. 嵌合相手品番: 7123-6585-80
2. 適用端子品番: 7114-1467-02 ETC.
3. 適用シール品番: 7157-3976-60 ETC.

NOTES

1. MATING PART NO. : 7123-6585-80
2. APPLICABLE TERMINAL NO. : 7114-1467-02 ETC.
3. APPLICABLE SEAL RUBBER NO. : 7157-3976-60 ETC.

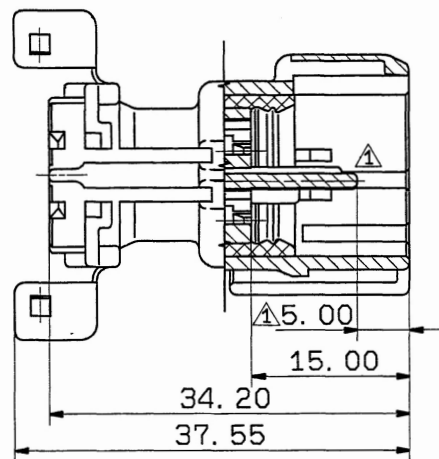

△SEC. A-A

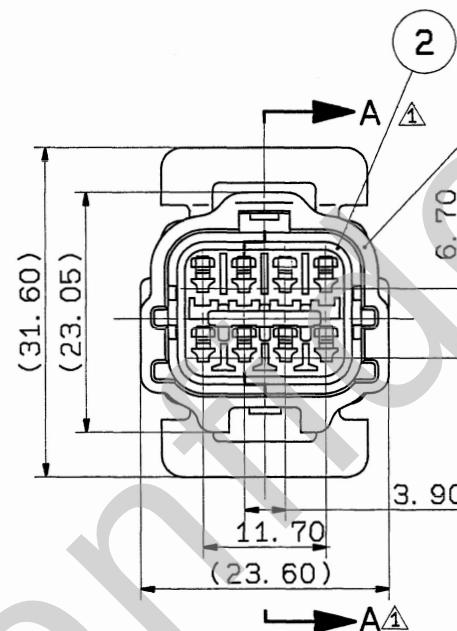

								CUSTOMER					MATL. SPEC.				SEE TABLE		TREAT. & FIN.		ISSUE MARK				
								CUSTOMER PART NO.				CUSTOMER DWG NO.													
△	95.07.06	CHANGED FORM ETC. △			C95-6443	H. K									NAME RV-TYPE CONNECTOR ----- 8PM(BR) SUB ASS'Y										
	95.05.11	NEW			C95-L738	T. K	OFFICE				TRIAL PART NO.														
LET	DATE	REVISION RECORD			NO.	CHKD	VENDOR																		
GENERAL TOLERANCE								VENDOR NO.																	
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. 7222-6585-80, △											
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	95.05.11	mm	2/1	3	CH. CODE											
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO. 7222-6585-80:R											
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	11 木		2 辻		杉山		KOUMATSU		小林		YAZAKI CORPORATION							
SPECIFIED							MASS		95.7.7		95.07.06		95.7.6		95.05.11		95.7.6								