

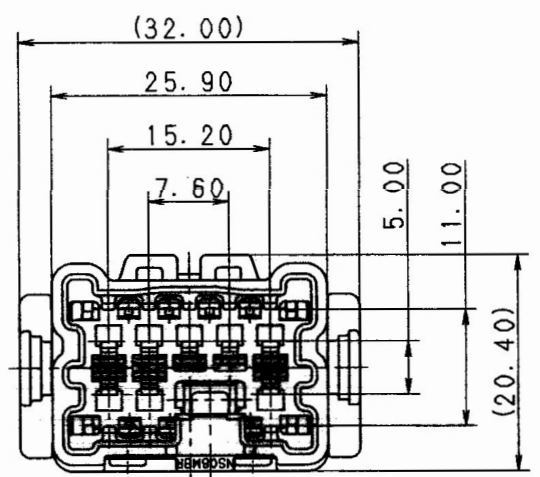


SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7222-6715-80. A	①	7122-6715-80	PBT	BROWN	1
	②	7157-6134-30	PP	BLACK	1

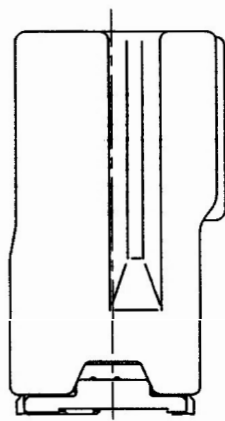

- 注 記
- 1. 嵌合相手品番: 7223-6715-80.
 - 2. 適用端子品番: 7114-1535-02 ETC.

- NOTES
- 1. MATING PART NO. : 7223-6715-80.
 - 2. APPLICABLE TERMINAL NO. : 7114-1535-02 ETC.

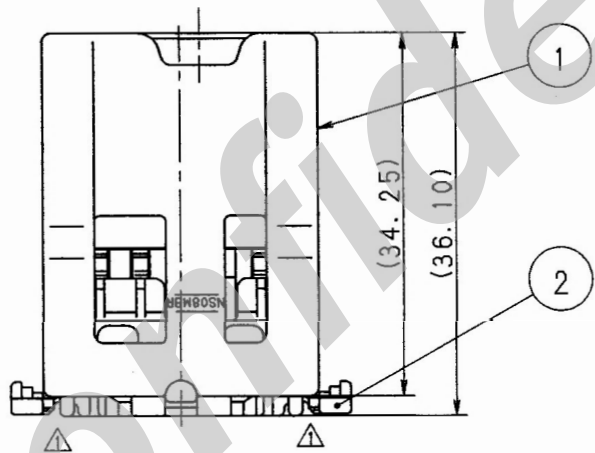

ISSUE MARK

△ 00.02.16		CHANGED FORM (REAR HOLDER), [A]		C00-L209		M. K		CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATL. SPEC.		SEE TABLE		TREAT. & FIN.			
96.06.10		NEW		C96-M091		M. T		OFFICE		TRIAL PART NO.				NAME		NS TYPE 8P					
LET DATE		REVISION RECORD		NO.		CHKD		VENDOR								SUB ASSEMBLY MALE					
GENERAL TOLERANCE								VENDOR NO.													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCI	ANGLE	PART NO.	7222-6715-80, [A]						
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	96.06.07	mm	2/1	3	CH. CODE							
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7222-6715-80:R		SET DWG NO.				
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	[Signature]	—	[Stamp]	M. TSUJI	T. YOSHIDA		YAZAKI CORPORATION							
SPECIFIED							MASS					浦野									
							g		00.02.21		00.02.18		93.03.08		00.02.16						