



SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7223-6410-80, A	①	7123-6410-80	PBT	BROWN	1
	②	7157-6131-30	PP	BLACK	1

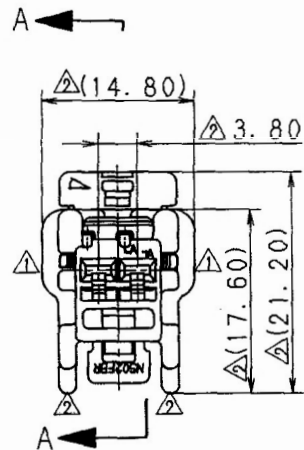

NOTE

1. APPLICABLE TERMINAL PART NO. : 7116-1820-02 ETC.

注記

1. 適用端子品番 : 7116-1820-02 ETC.

ISSUE MARK

△ 99.04.08 CHANGED FORM. A C99-L541 M. K					CUSTOMER			MATERIAL SPEC.		TREAT. & FIN.	
△ 98.05.15 CORRECTED AN ERROR C98-L888 M. K					CUSTOMER PART NO.			SEE TABLE			
△ 98.01.08 NEW C98-L098 M. K					OFFICE			NAME		NS TYPE 2P	
LET DATE REVISION RECORD NO. CHKD					VENDOR			TRIAL PART NO.			
GENERAL TOLERANCE 10MAX 50MAX 100MAX 250MAX 2500VR ANGLE ECCENT					VENDOR NO.			SUB ASSEMBLY FEMALE (BR)			
A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30' 0.1					DWG TYPE			PART NO.		7223-6410-80, A	
B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±30' 0.1					DWG SOURCE			CH. CODE			
◎ ±0.3 ±0.5 ±0.8 ±1.4 ±2 ±30' 0.15					APPROVED			DWG NO.		7223-6410-80:R	
SPECIFIED					CHECKED			DESIGN		DRAWN	
MASS					M. TSUJI			YOSHIDA			
99.04.20					99.04.16			99.04.12		91.04.27	
99.04.20					99.04.16			99.04.12		99.04.08	
										YAZAKI CORPORATION	