


1

2

3

SUB ASS'Y PART NO.	NO.	PART No.	MATERIAL	QTY.
7223-6715-80	①	7123-6715-80	PBT (BROWN)	1
	②	7157-6135-30	PP (BLACK)	1

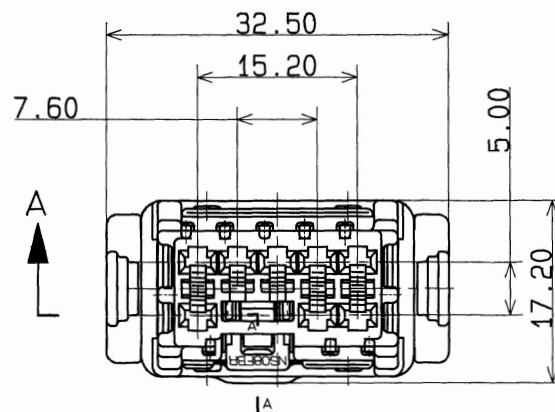


注 記

1. 嵌合相手品番 : 7222-6715-80.
2. 適用端子品番 : 7116-1820-02, 7116-1821-02.

NOTES

1. MATING PART NO.: 7222-6715-80.
2. APPLICABLE TERMINAL NO.: 7116-1820-02, 7116-1821-02.

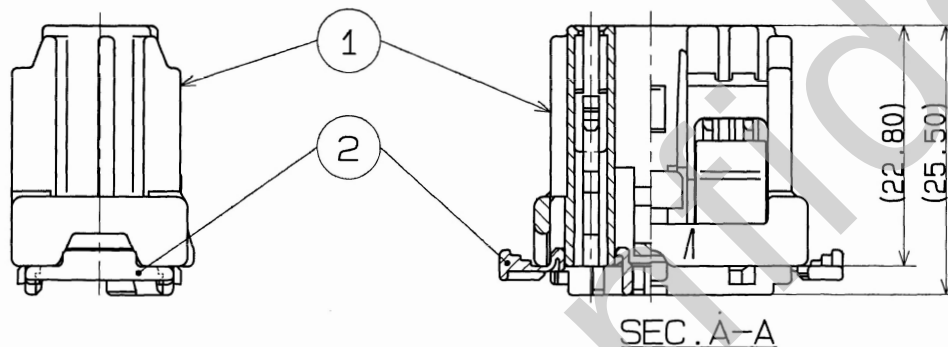

ISSUE MARK

CUSTOMER										MATL. SPEC. SEE TABLE				TREAT. & FIN.	
CUSTOMER PART NO.										CUSTOMER DWG NO.					
93.10.20 NEW C93-M075 H.F										OFFICE				NAME NS TYPE 8P	
LET DATE REVISION RECORD NO. CHKD										VENDOR				SUB ASS'Y FEMALE	
GENERAL TOLERANCE										VENDOR NO.				PART NO. 7223-6715-80	
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	DWG NO. 7223-6715-80: R	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	93.10.20	mm	2/1	3	YAZAKI CORPORATION	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN			
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				M.TSUJI	KUZUNO			
SPECIFIED								MASS		93.03.08		93.10.20			