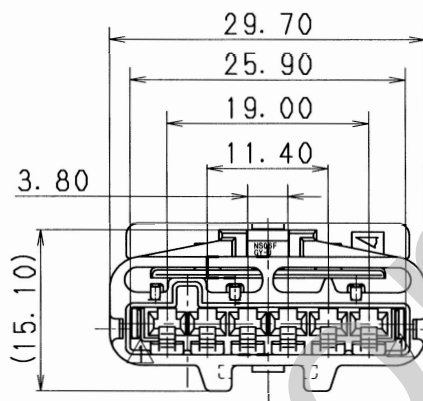
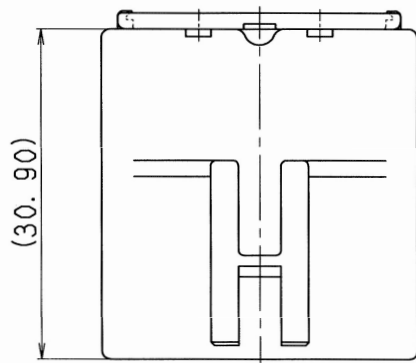



SPECIFIED TOLERANCE

1MAX	5MAX	10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT
±0.1	±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1

SUB ASSEMBLY PART NO.
AND CH. CODE

NO.	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
1	7123-6815-40	HOUSING	PBT	LIGHT GRAY	1
2	7157-6138-30	HOLDER	PP	BLACK	1

注 記

1. カン合相手品番: 7257-9313-40

2. 適用端子品番: 7116-1820-02, 7116-1821-02.

NOTES

1. MATING PART NO. : 7257-9313-40

2. APPLICABLE TERMINAL: 7116-1820-02, 7116-1821-02.

ISSUE MARK

				CUSTOMER				MATL. SPEC.				TREAT. & FIN.			
				CUSTOMER PART NO.				SEE TABLE							
08.05.27				CHANGED FORM, ETC.											
93.05.24				NEW											
LET				REVISION RECORD				NAME							
				NO.				NS TYPE JOINT CONNECTOR							
				CHKD				(6P) SUB ASS'Y FEMALE							
				VENDOR NO.				PART NO.							
				VENDOR NO.				7223-6815-40							
				DWG TYPE				DWG NO.							
				R				NEW							
				APPROVED				DWG DATE							
				CHECKED				93.05.24							
				CHECKED				UNIT							
				F3				mm							
				108.5.28				SCL							
				MASS				2:1							
				93.05.24				ANGLE							
				93.05.24				3							
				M. KASHIYAMA				DESIGN							
				C. AGCAOILI				DRAWN							
								PART NO.							
								7223-6815-40							
								DWG NO.							
								7223-6815-40:R							
								YAZAKI CORPORATION							