

1

2




3

TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7282-1128 ETC.	①	SEE TABLE 2	△ PBT	SEE TABLE 2	1
	②	7157-4047	△ PBT	NATURAL	1

△ TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
7282-1128.△	7182-1128	NATURAL
7282-1128-30.△	7182-1128-30	BLACK
7282-1128-40.△	7182-1128-40	LIGHT GRAY
7282-1128-50.△	7182-1128-50	ORANGE
7282-1128-80.△	7182-1128-80	BROWN
7282-1128-90.△	7182-1128-90	BLUE

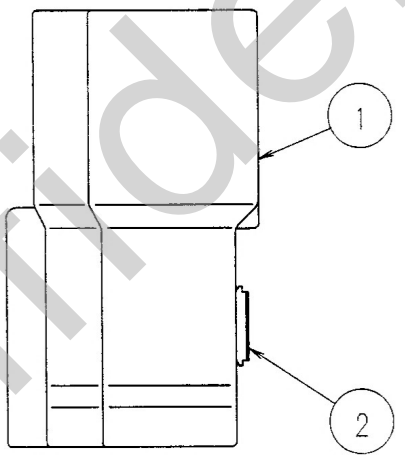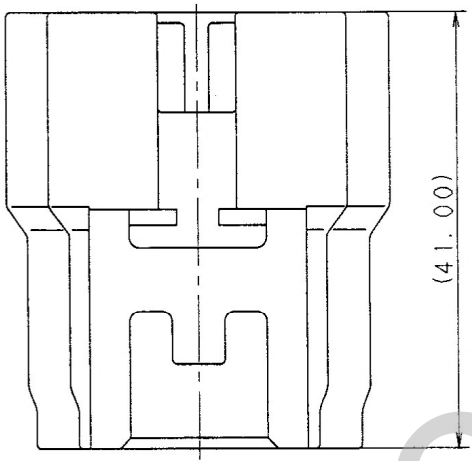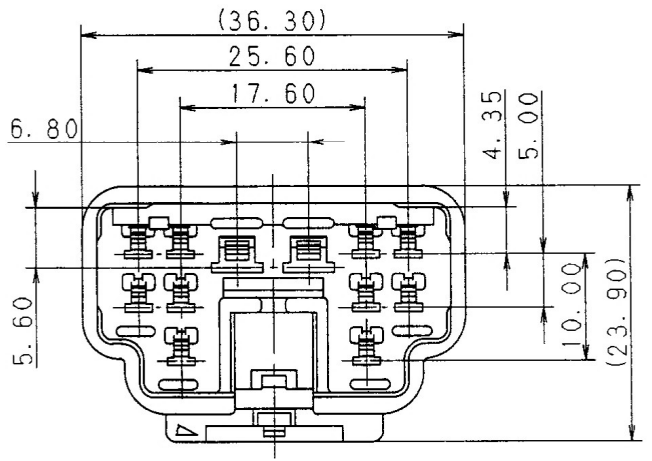

注記

1. 通用端子品番 : 7114-4020 ETC. (090II)
 : 7114-4030 ETC. (187)

△ 2. 嵌合相手品番 : 7283-1128 ETC.

NOTES

1. APPLICABLE TERMINAL NO.
 : 7114-4020 ETC. (090II)
 : 7114-4030 ETC. (187)

△ 2. MATING PART NO. : 7283-1128 ETC.

ISSUE MARK

△	99.02.11	ELIMINATED COLOR NO. & CHANGED MATERIAL	C99-L396	T. M	CUSTOMER	MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.								
△	96.07.18	CHANGED MATERIAL.△	C96-M141	H. K	CUSTOMER PART NO.	CUSTOMER DWG NO.										
	92.05.29	NEW	C92-L431	T. T	OFFICE	TRIAL PART NO.		NAME	090II 10P+187 2P HYBRID							
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR				CONNECTOR MALE SUB ASSEMBLY							
GENERAL TOLERANCE					VENDOR NO.											
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7282-1128 ETC.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	92.05.29	mm	2/1	3	CH. CODE		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO.	7282-1128:R	SET DWG NO.	
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				Y. OHTA	KANAZAWA				
SPECIFIED					MASS	g	加藤	山梨	藤	99.03.11	99.03.04	99.03.02	89.05.20	99.02.11	YAZAKI CORPORATION	