

1

2

3

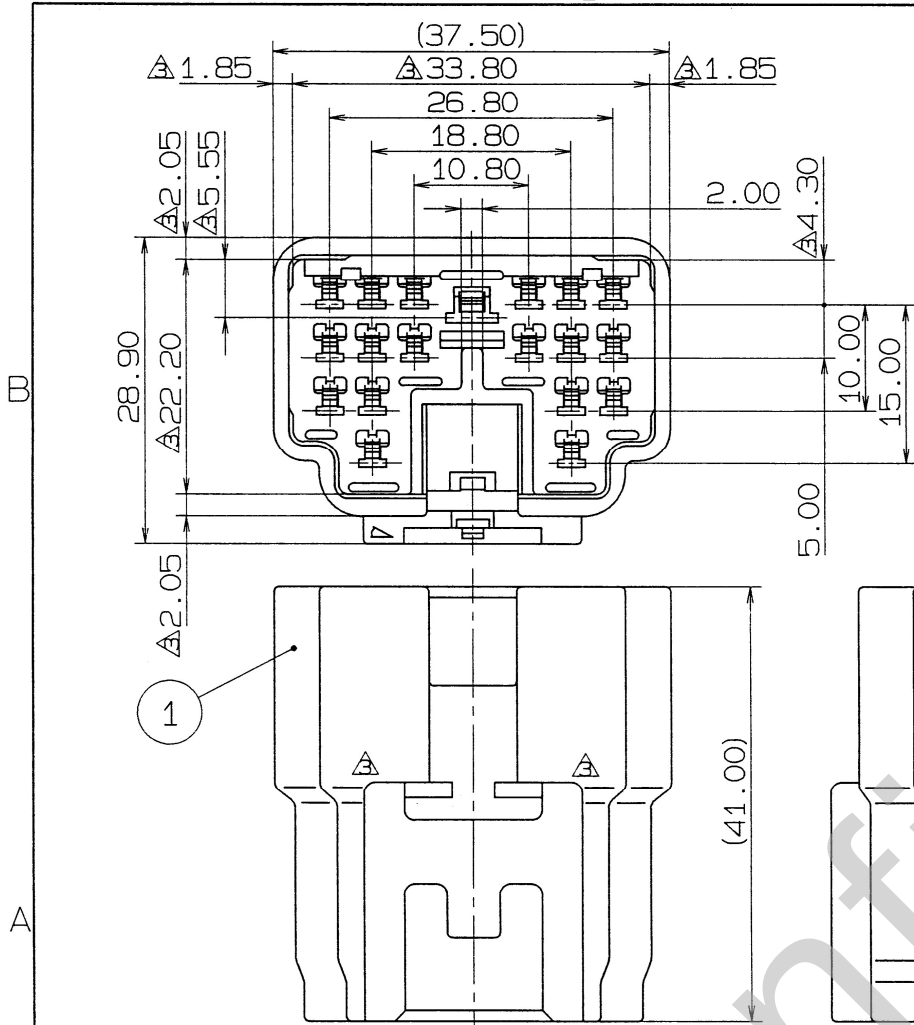


TABLE 1

SUB ASSEMBLY PART NO.	NO.	PART NO.	MATERIAL	COLOR	QTY.
7282-1198 ETC.	①	SEE TABLE 2	△ PBT	SEE TABLE 2	1
	②	7157-4051	△ PBT	NATURAL △	1

TABLE 2

SUB ASSEMBLY PART NO.	PART NO.	COLOR
7282-1198, △	7182-1198	NATURAL
7282-1198-10, △	7182-1198-10	DARK GRAY
7282-1198-30, △	7182-1198-30	BLACK
7282-1198-40, △	7182-1198-40	LIGHT GRAY
7282-1198-50, △	7182-1198-50	ORANGE
7282-1198-60, △	7182-1198-60	GREEN
7282-1198-80, △	7182-1198-80	BROWN
7282-1198-90, △	7182-1198-90	BLUE

注記

- 1) 嵌合相手品番 : 7283-1198 ETC.
2) 適用端子品番 : 090II 7114-4020 ETC.
187 7114-4030 ETC.

NOTES

- 1) MATING PART NO.: 7283-1198 ETC.
2) APPLICABLE TERMINAL NO. : 090II 7114-4020 ETC.
187 7114-4030 ETC.

△	97.12.11	CHANGED MATERIAL	C97-N746	H.K
△	96.07.11	CHANGED MATERIAL & CHANGED FORM, △	C96-M145	H.K
△	90.02.13	ADDED PART NO.	C90-L186	K.M
△	89.09.07	ADDED PART NO.	C89-L961	M.H
	88.12.24	NEW	C89-L038	K.J
LET	DATE	REVISION RECORD	NO.	CHKD

CUSTOMER		MATL. SPEC.		TREAT. & FIN.	
CUSTOMER PART NO.		CUSTOMER DWG NO.		NAME	
OFFICE		TRIAL PART NO.		090II 18P+187 1P HYBRID	
VENDOR		VENDOR NO.		CONNECTOR SUB ASSEMBLY MALE	

	10MAX	50MAX	100MAX	250MAX	2500VF	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1
◎	±0.3	±0.5	±0.8	±1.4	±2	±30°	0.15
SPECIFIED						MASS	
						g	

DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE	
R		NEW		88.12.24		mm		2/1		3	
APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		PART NO. 7282-1198 ETC.	
加藤		山梨		Y.OHTA		SERISAWA		DWG NO. 7282-1198: R		SET DWG NO.	
97.12.23		97.12.23		97.12.18		87.10.09		97.12.11		YAZAKI CORPORATION	

1

2

3