
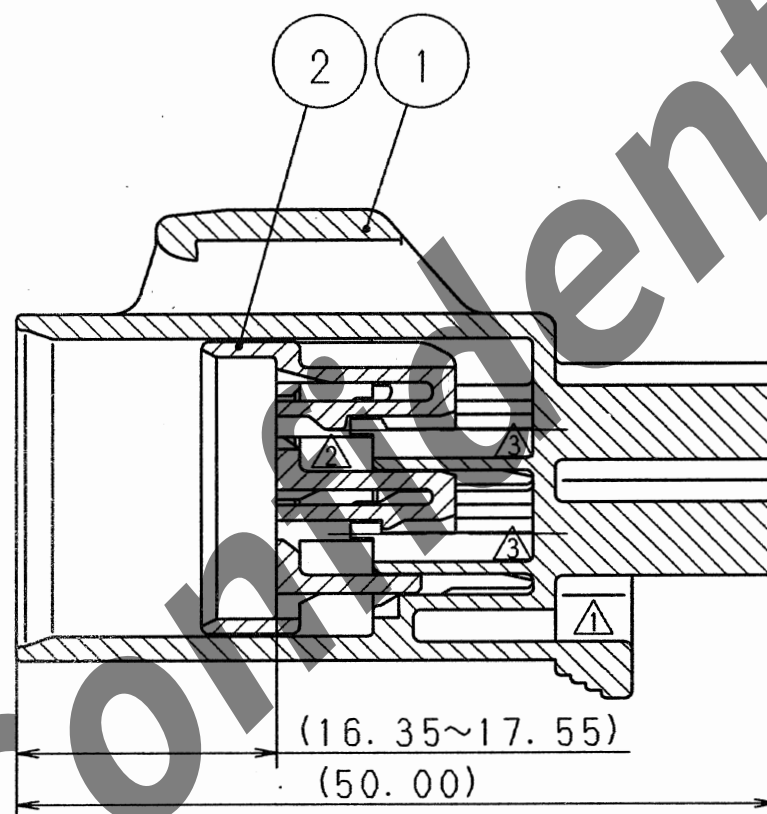
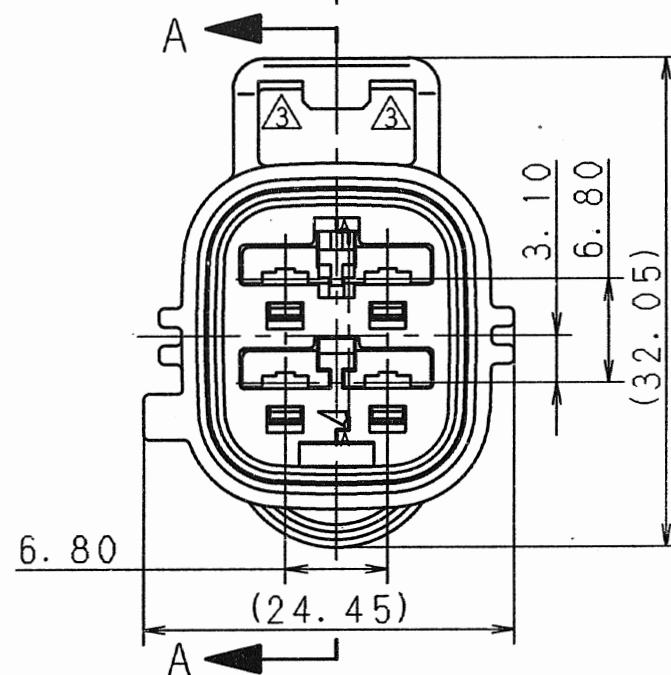


B

A

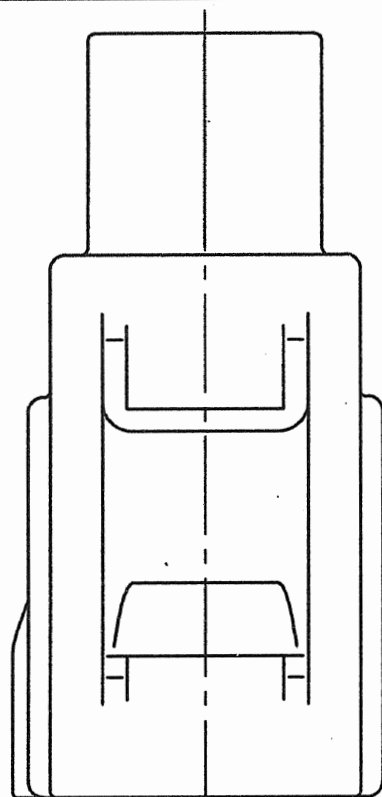

SEC. A-A

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7282-5571-30. [A]	①	7182-5571-30	HPA	BLACK	1
	②	7158-4192	HPA	NATURAL	1

注 記

1. 適用端子品番 : 7114-4150-02 ETC.
④ 2. 嵌合相手品番 : 7283-5571-30 ETC.
⑤ 3. 適用ゴム栓品番 : 7158-3111-60 ETC.
⑤ 4. 適用防水栓品番 : 7158-3114-90

NOTES

1. APPLICABLE TERMINAL PART NO.
: 7114-4150-02 ETC.
④ 2. MATING PART NO. : 7283-5571-30 ETC.
⑤ 3. APPLICABLE WIRE SEAL PART NO. : 7158-3111-60 ETC.
⑤ 4. APPLICABLE PLUG PART NO. : 7158-3114-90

B

A

⑤	99.11.22	ADDED NOTES	C99-M753	Y. I
④	99.01.07	CORRECTION	C99-6034	Y. I
③	98.05.06	CHANGED FORM ETC. [A]	C98-L679	H. T
②	96.10.16	CHANGED FORM	C96-M909	H. K
①	96.08.02	CHANGED FORM	C96-M442	A. Y
—	96.07.02	NEW	C96-M169	H. K
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS

g

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.	
OFFICE		TRIAL PART NO.			
VENDOR		VENDOR NO.			
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	96.07.02	mm	2/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
酒井	中田	永野 繁樹	Y. UCHIDA	T. YAMANE	
199.12.01	99.12.01	99.11.30	96.06.03	99.11.22	

MATL. SPEC.	SEE TABLE	TREAT. & FIN.	
NAME 2.8 SYSTEM SEALED CONNECTOR			
4P (M) SUB ASSEMBLY (TYPE-B)			

PART NO. CH. CODE	7282-5571-30.	[A]	
DWG NO.	7282-5571-30:R		SET DWG NO.
YAZAKI CORPORATION			

1

2

3

033

540