

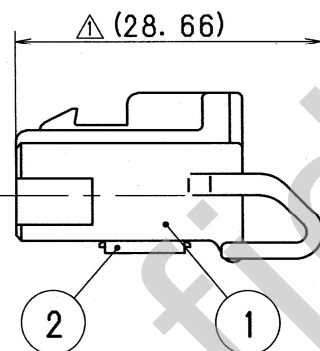
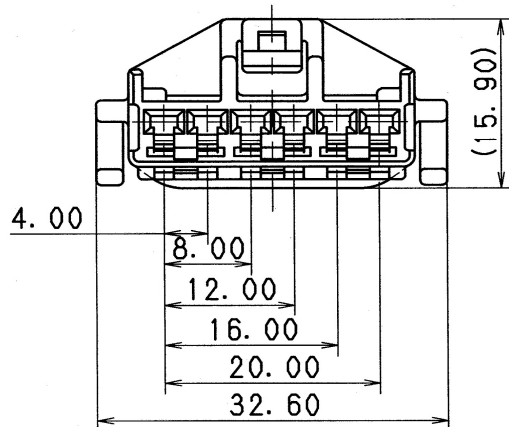
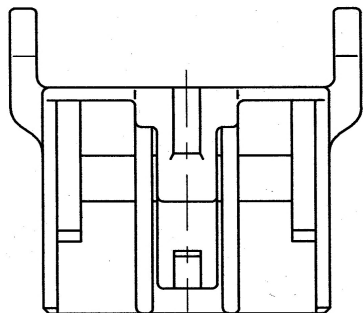


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-1062 ETC.	①	SEE TABLE 2	△ HPA	SEE TABLE 2	1
	②	7157-4098	△ HPA	NATURAL	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
7283-1062.△	7183-1062	NATURAL
7283-1062-10.△	7183-1062-10	DARK GRAY
7283-1062-30.△	7183-1062-30	BLACK
7283-1062-40.△	7183-1062-40	LIGHT GRAY
7283-1062-50.△	7183-1062-50	ORANGE
△ 7283-1062-60.△	7183-1062-60	GREEN
△ 7283-1062-80.△	7183-1062-80	BROWN
7283-1062-90.△	7183-1062-90	BLUE

注記

1. 適用端子品番: 7116-4020 ETC.

NOTE

1. APPLICABLE TERMINAL NO.: 7116-4020 ETC.

ISSUE MARK

				CUSTOMER				MATL. SPEC. SEE TABLE 1				TREAT. & FIN.	
				CUSTOMER PART NO.				CUSTOMER DWG NO.					
△ 05/02/10 CHANGED MATERIAL.△				C05-Z220 T. H				NAME △ 2. 3II (090II) 6P CONNECTOR					
90/11/10 NEW				C90-M210 M. H				SUB ASSEMBLY FEMALE					
LET DATE REVISION RECORD				NO. CHKD				PART NO. 7283-1062 ETC.					
				VENDOR				CH. CODE					
				VENDOR NO.				DWG NO. 7283-1062:R				SET DWG NO.	
GENERAL TOLERANCE								YAZAKI CORPORATION					
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	90/11/10	mm	2:1	3
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				Y. OHTA	K. REYES	
SPECIFIED				MASS									
				g									