

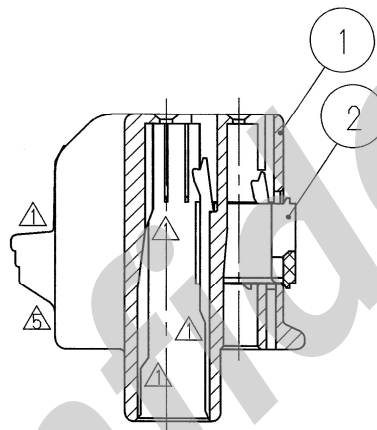
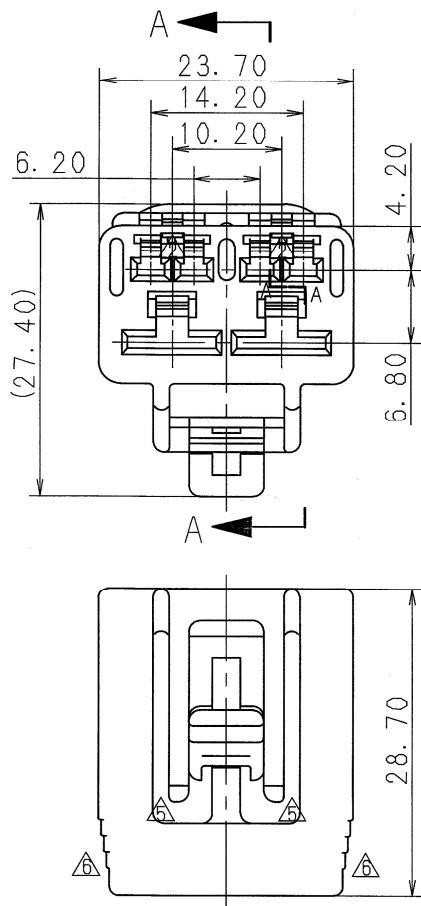


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-1064 ETC.	①	SEE TABLE 2	△ PBT	SEE TABLE 2	1
	②	7157-4331	△ PBT	NATURAL	1

△ TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
7283-1064, □	7183-1064	NATURAL
7283-1064-30, □	7183-1064-30	BLACK
7283-1064-40, □	7183-1064-40	LIGHT GRAY
7283-1064-50, □	7183-1064-50	ORANGE
7283-1064-60, □	7183-1064-60	GREEN
7283-1064-90, □	7183-1064-90	BLUE

注記

1. 嵌合相手品番: 7282-1064 ETC.

△ 2. 適用端子品番: 7116-4020 ETC. 2. 3Ⅱ(090Ⅱ)

△ : 7116-6040 ETC. 8. 0 (312)

NOTES

1. MATING PART NO. : 7282-1064 ETC.

△ 2. APPLICABLE TERMINAL NO. : 7116-4020 ETC. 2. 3Ⅱ(090Ⅱ)

△ : 7116-6040 ETC. 8. 0 (312)

SEC. A-A

△	03. 06. 03	CHANGED FORM & PART NAME	C03-X353	Y. I
△	99. 05. 11	CHANGED FORM & NOTES. □	C99-L582	T. M
△	97. 12. 11	CHANGED MATERIAL	C97-N740	H. K
△	96. 07. 12	CHANGED MATERIAL. □	C96-M262	H. K
△	96. 03. 01	CORRECTION OF A CLERICAL ERROR. □	C96-L303	H. K
△	95. 12. 04	CHANGED FORM & ADDED PART NO. , □	C95-M996	H. T
	90. 11. 10	NEW	C90-M211	M. H
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS

g

CUSTOMER		MATL. SPEC.		TREAT. & FIN.	
CUSTOMER PART NO.		SEE TABLE 1			
OFFICE		NAME		2. 3Ⅱ(090Ⅱ) 4P+8. 0 (312) 2P HYBRID	
VENDOR		TRIAL PART NO.		△ CONNECTOR SUB ASSEMBLY FEMALE	
VENDOR NO.		PART NO.		7283-1064 ETC.	
DWG TYPE		DWG SOURCE		CH. CODE	
R		NEW		7283-1064 : R	
APPROVED		CHECKED		DWG NO.	
Y. OHTA		Y. OHKUBO		7283-1064 : R	
89. 03. 21		03. 06. 03		SET DWG NO.	

YAZAKI CORPORATION