
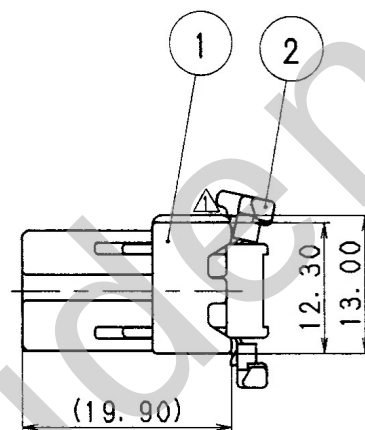
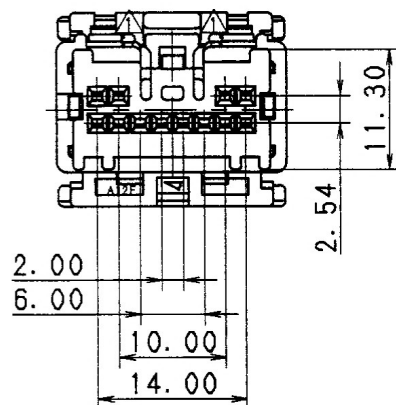


1

2

3

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-4127-40. $\square$	①	7183-4127-40	PBT	LIGHT GRAY	1
	②	7157-6777	PBT	NATURAL	1

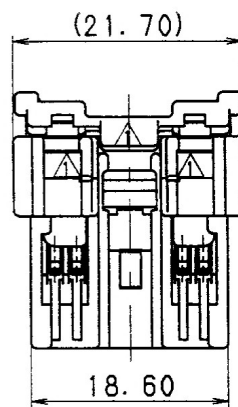

注 記

1. 嵌合相手品番: 7282-4127-40, 7382-4128-40

2. 適用端子品番: 7116-1670-02, 7116-1670-08,

: 7116-1800-02

NOTES

1. MATING PART NO. : 7282-4127-40, 7382-4128-40

2. APPLICABLE TERMINAL NO. : 7116-1670-02

: 7116-1670-08

: 7116-1800-02

ISSUE MARK

				CUSTOMER				MATL. SPEC.				TREAT. & FIN.			
				CUSTOMER PART NO.				CUSTOMER DWG NO.				SEE TABLE			
99.06.24				CHANGED FORM, ☒				C99-1596				M. F			
96.10.02				NEW				C96-7023				O. S			
LET				DATE				REVISION RECORD				NO.			
				CHKD				VENDOR							
				GENERAL TOLERANCE				VENDOR NO.							
				10MAX				50MAX				100MAX			
				250MAX				2500VR				ANGLE			
				ECCENT				DWG TYPE				DWG SOURCE			
				DWG DATE				UNIT				SCL			
				ANGLE				PART NO.				7283-4127-40. ☒			
				A				±0.15				±0.2			
				±0.3				±0.5				±0.75			
				±30'				0.1				R			
				NEW				96.10.02				mm			
				2/1				3				CH. CODE			
				B				±0.2				±0.3			
				±0.55				±0.95				±1.4			
				±30'				0.1				APPROVED			
				CHECKED				CHECKED				DESIGN			
				DRAWN				D. SUGIYAMA				YOSHIDA			
				C				±0.3				±0.5			
				±0.8				±1.4				±2			
				±30'				0.15				DWG NO.			
				7283-4127-40:R				SET DWG NO.							
				SPECIFIED				MASS				YAZAKI CORPORATION			
				g				99.06.24				99.06.24			
				99.06.24				99.06.24				99.06.24			
				99.06.24				99.06.24				99.06.24			