


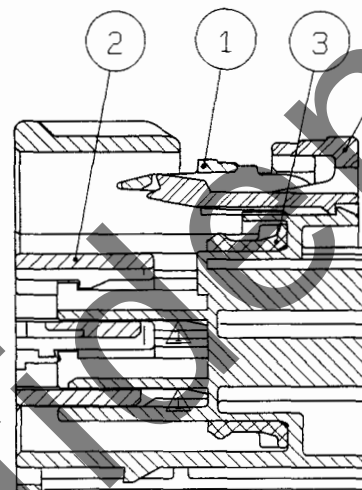

SEC. A-A

QTY.	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR
1	①	7183-5574-10	HPA	DARK GRAY
1	②	7158-4195	HPA	NATURAL
1	③	7137-2754-90	SILICONE RUBBER	BLUE
1	④	7158-7080-50	HPA	RED

7283-5927-10	SUB ASSEMBLY PART NO. & CH. CODE
7283-5574-10. A	

NOTES

- | | |
|---|--|
| 1. APPLICABLE TERMINAL PART NO. : 7116-4150-02 ETC. | |
| 2. MATING PART NO. : 7282-5574-10 | |
| 3. APPLICABLE WIRE SEAL NO. : 7158-3111-60 ETC. | |
| 4. APPLICABLE DUMMY PLUG NO. : 7158-3114-90 | |
| 注 記 | |
| 1. 適用端子品番 : 7116-4150-02 ETC. | |
| 2. 嵌合相手品番 : 7282-5574-10 | |
| 3. 適用ゴムの品番 : 7158-3111-60 ETC. | |
| 4. 適用防水品番 : 7158-3114-90 | |

注記

										ISSUE MARK						
△	99.11.15	ADDED PART NO. ETC.	C99-M695	M. K	CUSTOMER					MATL. SPEC.	SEE TABLE	TREAT. & FIN.				
△	98.09.04	CHANGED FORM. ☒	C98-M601	Y. I	CUSTOMER PART NO.			CUSTOMER DWG NO.			NAME 2.8 SYSTEM SEALED CONNECTOR 8P(F) SUB ASSEMBLY					
△	98.06.04	CHANGED FORM	C98-L927	Y. I												
-	97.03.28	NEW	C97-L606	Y. U	OFFICE			TRIAL PART NO.								
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR											
GENERAL TOLERANCE					VENDOR NO.					PART NO. CH. CODE △7283-5574-10 ETC. DWG NO. 7283-5574-10:R SET DWG NO.						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE				DWG DATE	UNIT	SCL	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW				97.03.28	mm	2/1	3
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED				CHECKED	DESIGN	DRAWN	
◎	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	酒井 下田 永野 築本		Y. UCHIDA		K. KUCHI				
SPECIFIED						MASS		99.11.23 99.11.23 99.11.19		97.03.18		99.11.15				
										YAZAKI CORPORATION						