
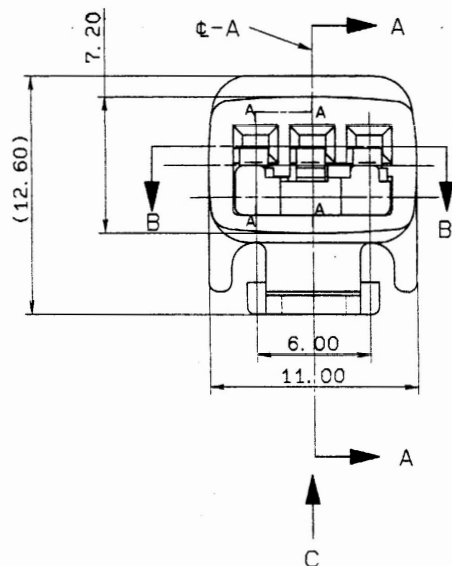


VIEW C

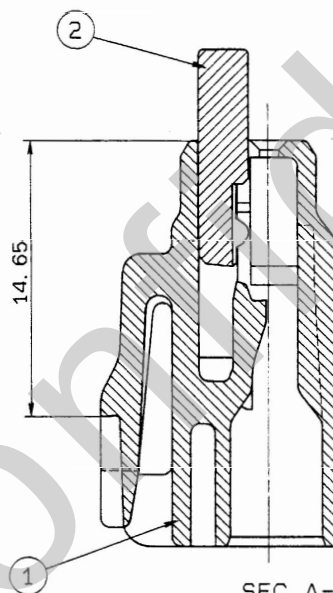

SEC. A-A

SUB ASS'Y NO.	NO.	YAZAKI PART NO.	YAZAKI PART NAME	MATERIAL	COLOR
7283-7632 ETC.	①	SEE TABLE	050 3P SEALED CONNECTOR HOUSING FEMALE	PBT	SEE TABLE
	②	7157-4373	050 3P SEALED CONNECTOR SPACER FEMALE	PBT	NATURAL
			YAZAKI SUB ASS'Y NO.	YAZAKI HOUSING PART NO.	COLOR
			7283-7632	7183-7632	NATURAL
			7283-7632-40	7183-7632-40	LIGHT GRAY

NOTES

- MATING PART NO. : 7282-7632 ETC.
- APPLICABLE TERMINAL NO. :
050 7116-4060-02 (CAVS 0.3~0.5, AVS 0.3)
- APPLICABLE SEAL RUBBER NO. :
7157-3920-40 (CAVS 0.3~0.5, AVS 0.3)

注記

- 適合相手品番 : 7282-7632 ETC.
- 適用端子品番 : 050 7116-4060-02 (CAVS 0.3~0.5, AVS 0.3)
- 適用ゴム4枚品番 : 7157-3920-40 (CAVS 0.3~0.5, AVS 0.3)

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
△	90.07.10	ADDED PART NO.	C90-L818	M. H
	90.05.24	NEW	C90-6572	H. Y

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
◎	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED				WEIGHT			

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MTRL SPEC		TREAT & FIN	
OFFICE		STDLIB NO.		NAME		050 3P SEALED CONNECTOR			
VENDOR		VENDOR NO.		PART NO.		7283-7632 ETC.			
DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL	
R		NEW		89.12.06		mm		5/1	
APPROVED		CHECKED		DESIGN		DRAWN		PART NO.	
河崎		加藤 渡部		AKEDA		S. INABA		7283-7632:R	
90.07.27		40.07.23		40.07.23		89.10.20		90.07.10	
								YAZAKI CORPORATION	