

1

2

3

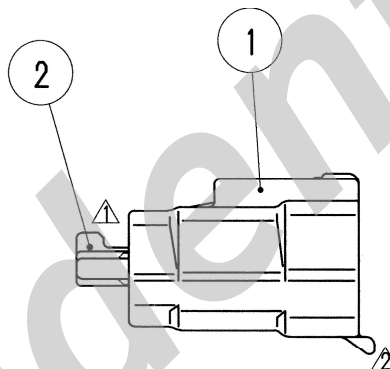
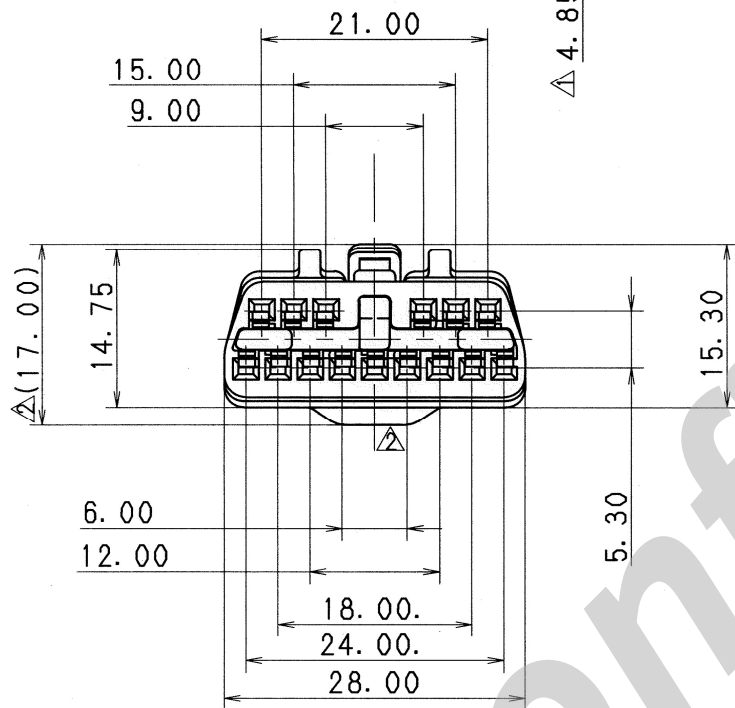
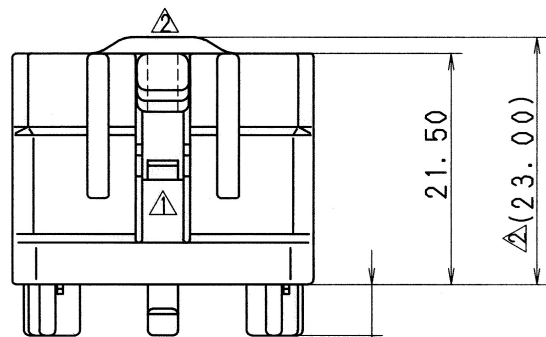


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-7650 ETC.	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	7157-4371	PBT	NATURAL	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
7283-7650	7183-7650	NATURAL
7283-7650-10	7183-7650-10	DARK GRAY
7283-7650-30	7183-7650-30	BLACK
7283-7650-40	7183-7650-40	LIGHT GRAY
7283-7650-50	7183-7650-50	ORANGE
7283-7650-60	7183-7650-60	GREEN
7283-7650-80	7183-7650-80	BROWN
7283-7650-90	7183-7650-90	BLUE

注記

- 1) 嵌合相手ハウジング品番: 7282-7650 ETC.
2) 適用端子品番: 7116-4060-02
3) 適用ゴム栓品番: 7157-3920-40

NOTES

- 1) MATING PART HOUSING NO.: 7282-7650 ETC.
2) APPLICABLE TERMINAL NO.: 7116-4060-02
3) APPLICABLE RUBBER STOPPER NO.: 7157-3920-40

ISSUE MARK

								CUSTOMER				MATL. SPEC. SEE TABLE				TREAT. & FIN.	
△	06/08/29	CHANGED FORM, ETC.		C06-Z957	T. H	CUSTOMER PART NO.			CUSTOMER DWG NO.			NAME 050 SEALED 15P HOUSING FEMALE SUB ASSEMBLY					
△	90/04/13	CHANGED FORM		C90-6399	K. O												
	89/09/04	NEW		C89-L915	M. H	OFFICE			TRIAL PART NO.								
LET	DATE	REVISION RECORD		NO.	CHKD	VENDOR											
GENERAL TOLERANCE						VENDOR NO.											
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. CH. CODE			
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	89/09/04	mm	5:1	3	△7283-7650 ETC.			
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO. 7283-7650:R SET DWG NO.				
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	川梨	鈴木	濱井	TAGUCHI	M. ADRIANO					
SPECIFIED						MASS								YAZAKI CORPORATION			

1

2

3