


YAZAKI SUB ASS'Y NO.	NO.	YAZAKI PART NO.	MATERIAL	COLOR	QTY.
7283-8710-30, A	①	7183-8710-30, A	PBT	BLACK	△ 1
	②	7137-2610-80	SILICONE RUBBER	RED-IRON	△ 1

NOTES


1. APPLICABLE TERMINAL NO. : 7116-1680-02, 7116-1680-08
2. APPLICABLE REAR HOLDER NO. : 7157-4600-80
3. MATING PART NO. : 7182-8710-30
4. APPLICABLE SEAL RUBBER NO. : 7157-3950-80, 7157-3951-60
5. APPLICABLE PLUGGING RUBBER STOPPER NO. : 7157-3952-80

注 記


1. 適用ターミナル品番 : 7116-1680-02, 7116-1680-08
2. 適用リヤホルダ品番 : 7157-4600-80
3. 嵌合相手品番 : 7182-8710-30
4. 適用ゴム栓品番 : 7157-3950-80, 7157-3951-60
5. 適用プラグ栓品番 : 7157-3952-80

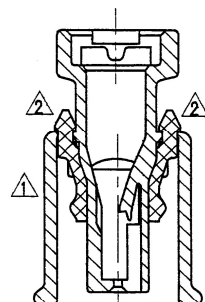

SEC. B-B

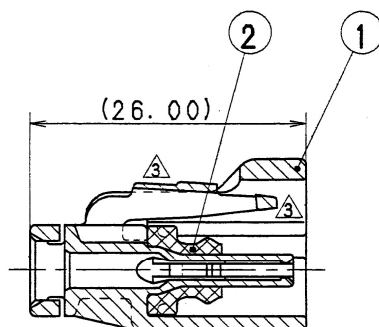

SEC. A-A

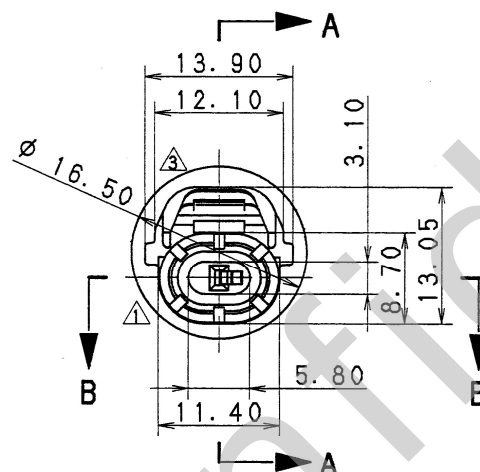

④	95.07.11	CHANGED NOTES	C95-M040	A. H								ISSUE MARK		
③	95.02.23	CHANGED FORM, A	C95-L260	K. S	CUSTOMER					MATL. SPEC.		TREAT. & FIN.		
②	92.03.02	CHANGED FORM	C92-L138	I. K	CUSTOMER PART NO.			CUSTOMER DWG NO.			SEE TABLE			
①	91.06.10	CHANGED FORM&RENEW	C91-6957	I. I						NAME ③		SSD CONNECTOR HOUSING		
	91.01.10	NEW	C91-L005	S. I	OFFICE			TRIAL PART NO.						
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR									
GENERAL TOLERANCE				VENDOR NO.										
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	91.01.10	mm	2/1	3	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	手書	石塚	野島	ABE	K. SUZUKI		
SPECIFIED				MASS				95.07.18		95.07.14	95.07.14	90.07.18	95.07.11	
				g										
YAZAKI CORPORATION														