


SEC. B-B

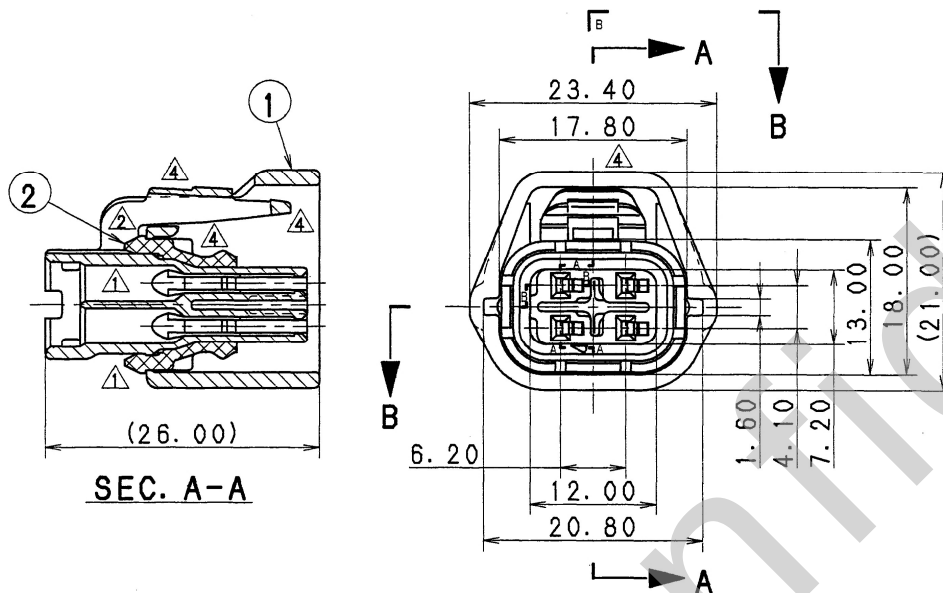

SEC. A-A

TABLE 1

YAZAKI SUB ASS'Y NO.	NO.	YAZAKI PART NO.	MATERIAL	COLOR	QTY.
△7283-8740 ETC.	①	SEE TABLE 2	PBT	SEE TABLE 2	△1
	②	7137-2614-80	SILICONE RUBBER	RED-IRON	△1

TABLE 2

YAZAKI SUB ASS'Y NO.	YAZAKI PART NO.	COLOR
7283-8740-10, △	7183-8740-10, △	DARK GRAY
7283-8740-30, △	7183-8740-30, △	BLACK

NOTES

- △ 1. APPLICABLE TERMINAL NO. : 7116-1680-02, 7116-1680-08
2. APPLICABLE REAR HOLDER NO. : 7157-4604-80
- △ 3. MATING PART NO. : 7182-8740-30 ETC.
- △ 4. APPLICABLE SEAL RUBBER NO. : 7157-3950-80, 7157-3951-60
- △ 5. APPLICABLE PLUGGING RUBBER STOPPER NO. : 7157-3952-80

注 記

- △ 1. 適用ターミナル品番 : 7116-1680-02, 7116-1680-08
2. 適用リヤホルダ品番 : 7157-4604-80
- △ 3. 嵌合相手品番 : 7182-8740-30 ETC.
- △ 4. 適用ゴム栓品番 : 7157-3950-80, 7157-3951-60
- △ 5. 適用プラグ栓品番 : 7157-3952-80

△	95.07.11	CHANGED NOTES	C95-M045	A. H
△	95.02.23	CHANGED FORM, △	C95-L260	K. S
△	94.08.01	ADDED PART NO.	C94-M099	K. S
△	92.08.28	CHANGED FORM&RENEW	C92-6836	I. K
△	92.03.02	CHANGED FORM	C92-L138	I. K
	90.09.25	NEW	C90-L993	S. I
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	250QVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED					MASS		

CUSTOMER	
CUSTOMER PART NO.	
CUSTOMER DWG NO.	
OFFICE	
TRIAL PART NO.	
VENDOR	
VENDOR NO.	

MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.	
NAME	SSD CONNECTOR HOUSING		
	4P FEMALE SUB ASS'Y		
PART NO.	△7283-8740-30 ETC.		
CH. CODE	7283-8740-30 : R		
DWG NO.	YAZAKI CORPORATION		

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	90.09.25	mm	△2/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
			OHTAKA	K. SUZUKI	
				半田	