
GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

YAZAKI ASSEMBLY PART NO.	NO.	PART NO.	PART NAME	MATERIAL	COLOR	QTY
7283-9016-30,A	①	7183-9010-30	HOUSING	PBT-G	BLACK	1
	②	7158-6580	FRONT HOLDER	PBT-G	NATURAL	1





注記

1. 適応端子品番 : 7116-4618-02 ETC.
2. かん合相手品番 : USCAR 064-U-004-1-Z02


NOTES

1. APPLICABLE TERMINAL NO. : 7116-4618-02 ETC.
2. MATING PART NO. : USCAR 064-U-004-1-Z02

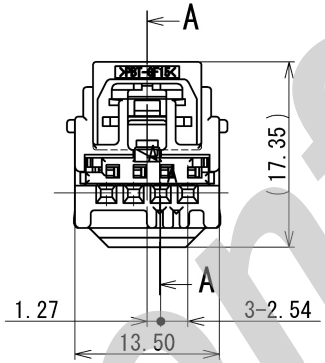



SEC.A-A



△2 7283-9016-30
(OPTION A)BLACK

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
△2	2011/03/29	ADDED VIEW	C11-Z226	Y.W
△1	2010/10/15	CHANGED PART NAME	C10-ZA72	N.B
	2006/10/19	NEW,A	C06-ZB43	T.Y

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED					MASS		

CUSTOMER					
CUSTOMER PART NO.		CUSTOMER DWG NO.			
OFFICE		TRIAL PART NO.			
VENDOR					
VENDOR NO.					
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	2006/10/19	mm	2:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
N.SUGIE	———	Y.WADA	T.MIYAKAWA	J.CANDO
2011/03/29	———	2011/03/29	2003/12/18	2011/03/29

MATL. SPEC. SEE TABLE

TREAT. & FIN.

NAME △1KAIZEN 0.64 SYSTEM UNSEALED HOUSING
4P FEMALE 1ROW TYPE SUB ASSEMBLY

PART NO. 7283-9016-30,A
CH. CODE

DWG NO. 7283-9016-30:R

SET DWG NO.

YAZAKI CORPORATION

Confidential