


△ CODING OVERVIEW
CODE A (SCALE 1:1)

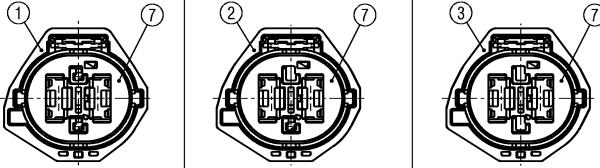


P/N: 7287-1403-30
COLOR: BLACK
P/N: 7289-5783-30, △
7289-7643-30 △
YPT HYBRID CONNECTOR △
4P (1.5x2 + 9.5x2) (F) SUBASSY. CODE A

P/N: 7287-1404-10
COLOR: DARK GRAY
P/N: 7289-5784-10, △
7289-7641-10 △
YPT HYBRID CONNECTOR △
3P (1.5x1 + 9.5x2) (F) SUBASSY. CODE A

P/N: 7287-1405-80
COLOR: DARK BROWN
P/N: 7289-5785-80, △
7289-7639-80 △
YPT HYBRID CONNECTOR △
2P (9.5x2) (F) SUBASSY. CODE A


△ CODE B (SCALE 1:1)

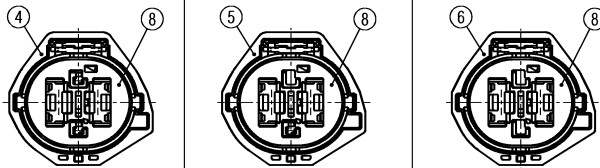


P/N: 7287-1406-30
COLOR: BLACK
P/N: 7289-5786-30, △
7289-7644-30 △
YPT HYBRID CONNECTOR △
4P (1.5x2 + 9.5x2) (F) SUBASSY. CODE B

P/N: 7287-1407-10
COLOR: DARK GRAY
P/N: 7289-5787-10, △
7289-7642-10 △
YPT HYBRID CONNECTOR △
3P (1.5x1 + 9.5x2) (F) SUBASSY. CODE B

P/N: 7287-1408-80
COLOR: DARK BROWN
P/N: 7289-5788-80, △
7289-7640-80 △
YPT HYBRID CONNECTOR △
2P (9.5x2) (F) SUBASSY. CODE B

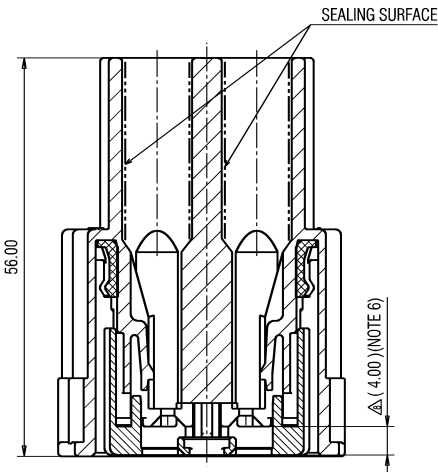


SECTION B-B

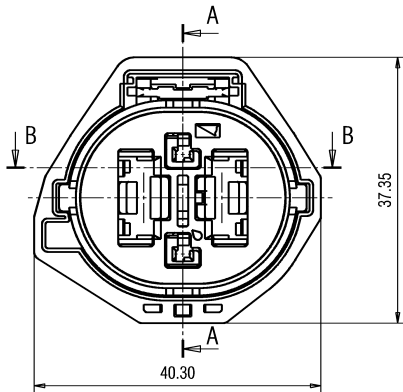


△	16.09.2025.	SHAPE CHANGE	Y25-0386	M.Z.
△	20.02.2024.	UPDATED NOTES	Y24-0075	M.Z.
△	08.04.2016.	ADDED NEW CPA VERSION, UPDATED TABLE & NOTES	Y16-0233	B.F.
△	11.05.2015.	UPDATED TABLE	Y15-0223	B.F.
△	07.04.2015.	UPDATED TABLE	Y15-0171	B.F.
△	23.09.2013.	UPDATED TABLE	Y13-0531	J.J.
△	14.06.2012.	UPDATED CODINGS	Y12-0504	J.J.
△	09.04.2009.	UPDATED NOTES	Y09-0101	J.J.
△	15.07.2008.	CHANGED NAMES	Y08-0045	J.J.
△	24.10.2006.	NEW	C07-0523	J.J.
LET	DATE	REVISION RECORD	NO.	CHKD


1

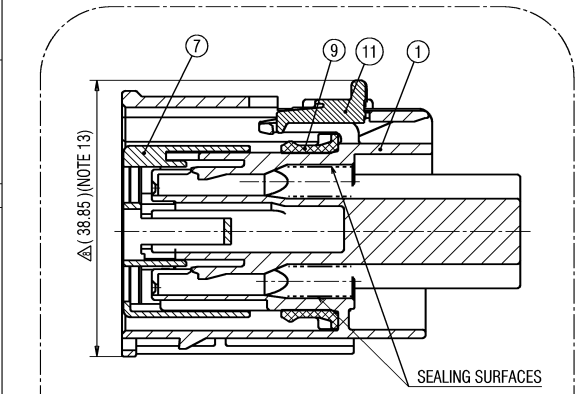

△ CPA (HIGH PROFILE) VERSION 2:
7289-7643-30, 7289-7641-10, 7289-7639-80,
7289-7644-30, 7289-7642-10, 7289-7640-80

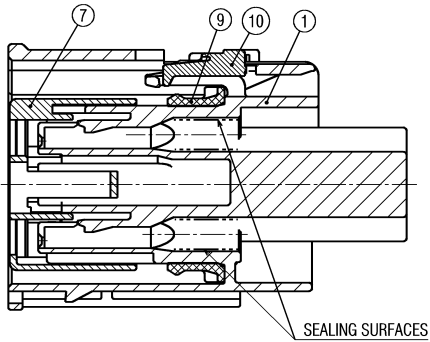

△△ CPA (LOW PROFILE) VERSION:
7289-5783-30, 7289-5784-10, 7289-5785-80,
7289-5786-30, 7289-5787-10, 7289-5788-80

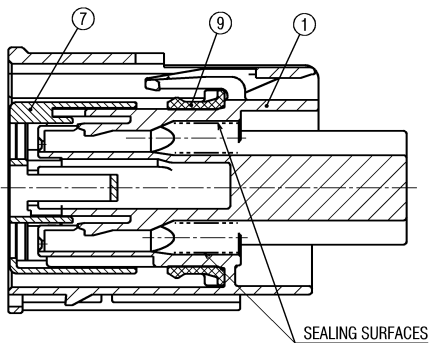


SECTION A-A


2

3


4

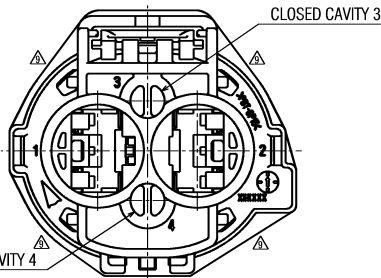

△ BACK VIEW
FOR 2P CONFIGURATION

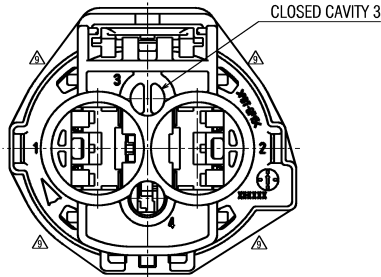

△ BACK VIEW
FOR 3P CONFIGURATION

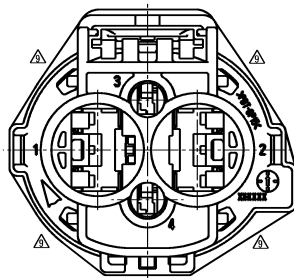

△ BACK VIEW
FOR 4P CONFIGURATION

GENERAL TOLERANCE △									
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT		
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±1°	0.1		
○	±0.3	±0.5	±0.8	±1.4	±2	±1°30'	0.15		
SPECIFIED	△					MASS	~22.9 g		

4


5

△QUANTITY																	QTY
				⊙								⊙				1	
			⊙									⊙				1	
		⊙										⊙				1	
	⊙											⊙				1	
			⊙											⊙		1	
⊙																1	
																1	
			⊙	⊙	⊙	⊙								⊙	⊙	1	
⊙	⊙													⊙	⊙	1	
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	1	
																1	
7287-1407-10	7287-1406-30	7287-1405-80	7287-1404-10	7287-1403-30	7289-7640-80	7289-7642-10	7289-7644-30	7289-7639-80	7289-7641-10	7289-7643-30						1	
△	△	△	△	△	△	△	△	△	△	△							
									</								


CLOSED CAVITY 3

CLOSED CAVITY 4


CLOSED CAVITY 3



△ ISOMETRIC VIEW
(SCALE 1:1)



△ ISOMETRIC VIEW
WITH OPTIONAL CPA
(SCALE 1:1)



△ ISOMETRIC VIEW
WITH OPTIONAL CPA VERSION 2
(SCALE 1:1)

CUSTOMER	-	CUSTOMER PART NO.	-	CUSTOMER DWG NO.	-
OFFICE	YEL-BL	TRIAL PART NO.	-	VENDOR	X40683-D768
VENDOR	-	VENDOR NO.	-	DWG TYPE	NEW
DWG SOURCE	NEW	DWG DATE	18.10.2007	UNIT	mm
APPROVED	G. GREGURIC	CHECKED	B. FRETZE	DESIGN	B. FRETZE
DRAWN	M. POLGAR	DRAWN	M. ZOKALJ	DATE	10.10.2006

MATL. SPEC.	SEE TABLE	TREAT. & FIN.	-
NAME	YPT HYBRID WP CONNECTOR Δ ----- 4P (F) SUBASSEMBLY		
PART NO.	7287-1403-30 ETC.		
CH. CODE	7287-1403-30-R		
DWG NO.	7287-1403-30:R		SET DWG NO.
			

A1