
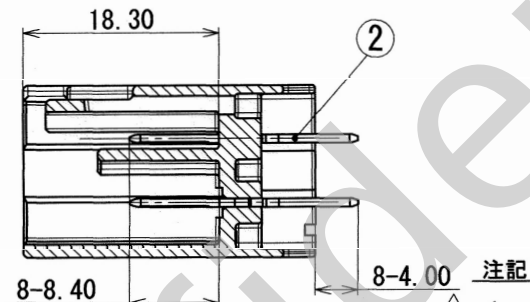
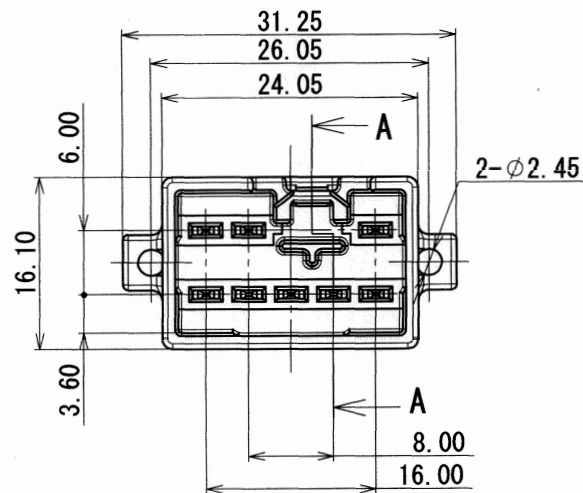


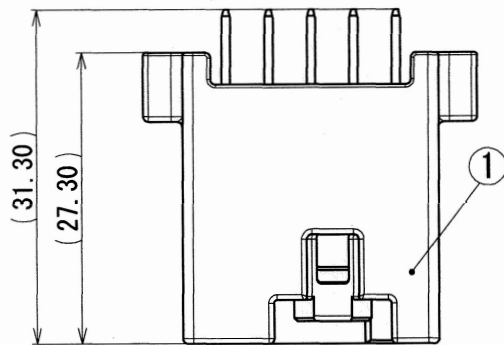


SEC. A-A

NOTES

- △ 1. MATING PART NO. : 7183-6096 ETC.
2. RECOMMENDED SCREW: JIS B 1122, PAN HEAD TAPPING SCREW WITH CROSS RECESSED, TYPE2, M3×L6
3. RECOMMENDED SCREW TIGHTENING TORQUE : 0.4~0.6N・m

ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
7382-3805	①	7182-3805	1.5 8P PCB-V CONNECTOR HOUSING MALE	PBT-G	NATURAL	1
	②	7114-3593-02	1.5 TERMINAL MALE (PCB-V)	BRASS TIN PLATING	—	8
7382-3805-30	①	7182-3805-30	1.5 8P PCB-V CONNECTOR HOUSING MALE	PBT-G	BLACK	1
	②	7114-3593-02	1.5 TERMINAL MALE (PCB-V)	BRASS TIN PLATING	—	8

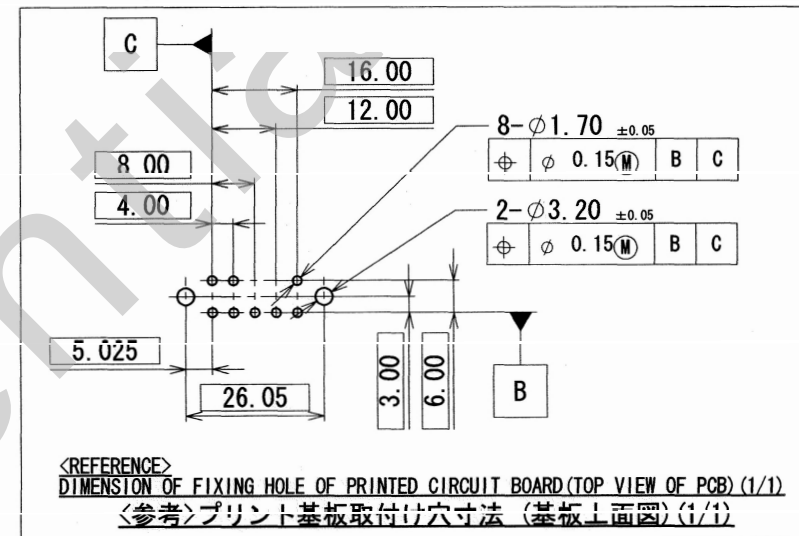

- △ 1. かん合相手品番 : 7183-6096 ETC.
2. 推奨ねじ : JIS B 1122 十字穴付なベタタピンねじ 2種 M3×L6
3. 推奨ねじ締めトルク : 0.4~0.6N・m

								CUSTOMER				MATERIAL SPEC.				SEE TABLE		TREAT. & FIN.			
								CUSTOMER PART NO.				CUSTOMER DWG NO.									
△	06/09/07	ADDED COLOR PART NO., ETC.		C06-Z970		S. G										NAME 1.5 8P PCB-V CONNECTOR					
	04/09/17	NEW		C04-PB51		Y. K		OFFICE				TRIAL PART NO.									
LET	DATE	REVISION RECORD		NO.		CHKD		VENDOR								HOUSING MALE ASSEMBLY					
GENERAL TOLERANCE								VENDOR NO.													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE		DWG SOURCE		DWG DATE		UNIT	SCALE	ANGLE	PART NO. △ 7382-3805 ETC.				
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	O.1	R		NEW		04/09/17		mm	2:1	3	CH. CODE				
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	O.1	APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO. 7382-3805:R			
③	±0.3	±0.5	±0.8	±1.4	±2	±30'	O.15	[Signature]		[Signature]		[Signature]		K. YOSHIDA		M. UY		SET DWG NO.			
SPECIFIED							MASS		g		06.09.08		06.09.08		06/09/07		04/09/17		06/09/07		
																		YAZAKI CORPORATION			