
△TABLE 1

ASS'Y PART NO.	NO.	PART NO.	MATERIAL	COLOR	QTY.
7382-4082 ETC.	①	SEE TABLE 2.△	PBT	SEE TABLE 2.△	1
	②	7114-1476	C2600R (t=0.6) TIN PLATING		3
	③	7114-1477	C2600R (t=0.6) TIN PLATING		5


△TABLE 2

ASS'Y PART NO.	PART NO.	COLOR
7382-4082	7182-4082	NATURAL
△ 7382-4082-30	7182-4082-30	BLACK
△ 7382-4082-40	7182-4082-40	LIGHT GRAY
△ 7382-4082-50	7182-4082-50	ORANGE
△ 7382-4082-60	7182-4082-60	GREEN
△ 7382-4082-70	7182-4082-70	YELLOW
△ 7382-4082-80	7182-4082-80	BROWN
△ 7382-4082-90	7182-4082-90	BLUE

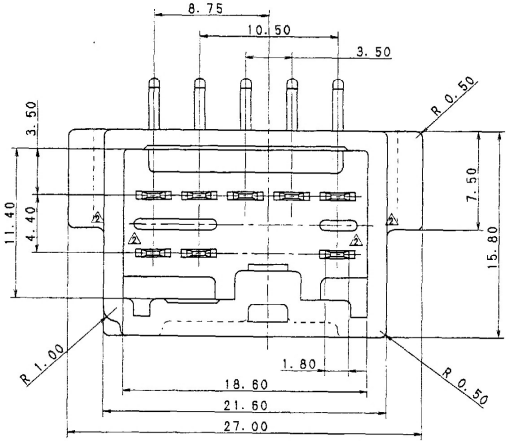

HOLE POSITION FOR PRINT CIRCUIT BORD SHOULD BE AS FOLLOW. DIAMETER OF PREPARED HOLE ARE REFERENCE DIMENSION.

プリント サーキット ボード下孔径を下記に示す．但し，下孔径は参考とする．

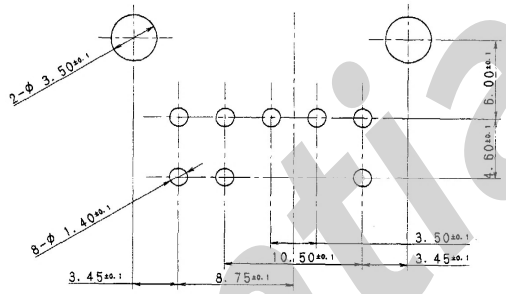

注記

1) 組合部品

矢崎部品名称	矢崎部品番号
3DLⅡコネクタ 8P(F)	7383-4080

2) 推奨タッピンねじ (JIS B1115, B1122) 及び締め付けトルク.

M3XL6 ナベ2種 29.4~39.2Ncm(3~4kgfcm)


NOTES


1) MATING PART NO.


YAZAKI PARTS NAME	YAZAKI PARTS NO.
3DLⅡ CONNECTOR 8P(F)	7383-4080

2) RECOMMENDABLE FASTENING TAPPING SCREWS (JIS B1115, B1122) & TIGHTENING TORQUE:


M3XL8 PAN HEAD SECOND CLASS 29.4~39.2Ncm(3~4kgfcm)

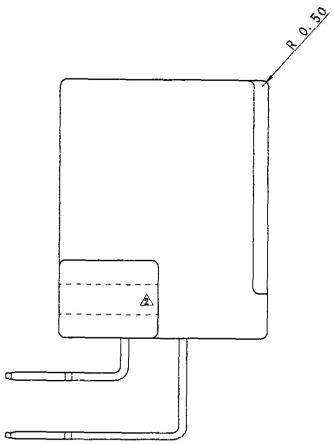

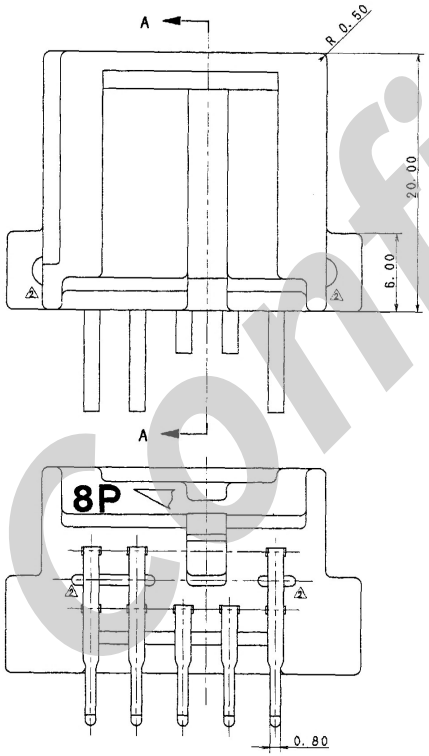

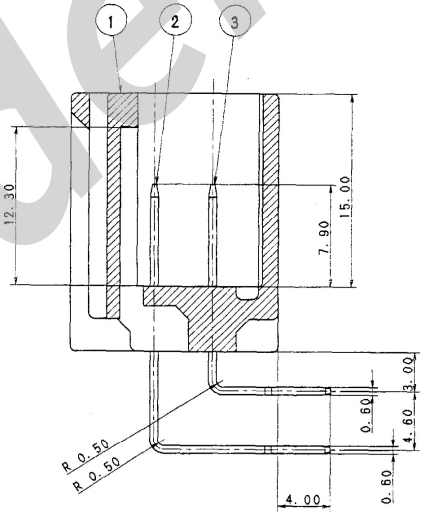

SEC. A-A

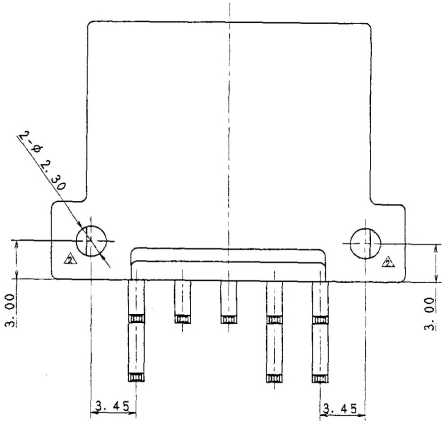

LET	DATE	REVISION RECORD	NO.	CHKD
△	95.04.19	CHANGED FORM	C95-L398	I.K
△	94.05.19	ADDED PART NO.	C94-L369	A.H
	93.08.18	NEW	C93-6908	I.K

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED MASS g

CUSTOMER			MATL. SPEC.	SEE TABLE 1 △	TREAT. & FIN.	
CUSTOMER PART NO.		CUSTOMER DWG NO.				
OFFICE		TRIAL PART NO.	NAME	SDL PCB-H CONNECTOR		
VENDOR				ASS'Y 8P MALE		
VENDOR NO.			PART NO.	7382-4082 ETC. △		
DWG TYPE	DWG SOURCE	DWG DATE / UNIT / SCL / ANGLE	CH. CODE			
R	NEW	93.08.18 / mm / 5/1 / 3	DWG NO.	7382-4082:R		
APPROVED	CHECKED	CHECKED / DESIGN / DRAWN				
95.04.25	95.04.24	95.04.21 KAMEYAMA / 93.08.18 MASUBUCHI / 95.04.19		YAZAKI CORPORATION		

ISSUE MARK

Confidential